RENUOX OIL

Ultimate Quality Lubricant

GENERAL CATALOGUE



Language: English & French

RENUOX OIL

Ultimate Quality Lubricant



PERFORMANCE
YOU CAN FEEL

WWW.RENUOXOIL.CA



RENUOX OIL

Ultimate Quality Lubricant

RENUOX OIL

Ultimate Quality Lubricant

In the name of him who gave thought and gifted the ability to produce to man so that he can present the best to the world by using what he has.

Renuox Oil International Company, with the main goal of producing oil and oil products, provides the best and highest quality oil for specialized engines.
Based on the knowledge and need of lubrication for advanced and modern gasoline, diesel, turbocharged, supercharged, hybrid, and marine engines, Renuox Oil has produced high quality products with distinctive packaging.
We guarantee that you can safely use our products and enjoy working with your device or vehicle in different weathers and difficult conditions, and in order to achieve this pleasure, always think of Renuox Oil, the strength that is your best choice.
Relying on the three principles of responsibility, quality and respect, we at Renuox international companies and agencies seek to create a sense of satisfaction in this big family that consists of our employees, suppliers, distributors and customers.
It is very clear that now the market needs are much different from the past and are accompanied by awareness, and the customers' demand is based on more advanced products and in sync with the world's modern technology.
Therefore, we are always looking for a suitable answer to the needs of the domestic and international markets with a continuous effort and benefiting from the best technologies and the best laboratory, production, and commercial equipment and employing expert personnel at all levels.
By being responsible for our products, we have been able to support our products with a good guarantee.

The last word: Your trust is our honor

RENUOX OIL

Ultimate Quality Lubricant

Au nom de Celui qui a donné la pensée et offert la capacité de produire à l'homme afin qu'il puisse présenter le meilleur au monde en utilisant ce qu'il a.

****Renuox Oil International Company****, avec pour objectif principal de produire de l'huile et des produits pétroliers, fournit la meilleure huile de la plus haute qualité pour les moteurs spécialisés.
Basé sur la connaissance et le besoin de lubrification pour les moteurs à essence, diesel, turbo, suralimentés, hybrides et marins avancés et modernes, **Renuox Oil** a produit des produits de haute qualité avec un emballage distinctif.
Nous garantissons que vous pouvez utiliser nos produits en toute sécurité et profiter de travailler avec votre appareil ou véhicule dans différentes conditions météorologiques et difficiles. Pour atteindre ce plaisir, pensez toujours à **Renuox Oil**, la force qui est votre meilleur choix.
En nous appuyant sur les trois principes de responsabilité, de qualité et de respect, nous, aux sociétés et agences internationales de **Renuox**, cherchons à créer un sentiment de satisfaction dans cette grande famille composée de nos employés, fournisseurs, distributeurs et clients.
Il est très clair que les besoins du marché sont maintenant très différents du passé et sont accompagnés de conscience. La demande des clients est basée sur des produits plus avancés et en phase avec la technologie moderne du monde.
Par conséquent, nous cherchons toujours une réponse appropriée aux besoins des marchés nationaux et internationaux avec un effort continu et en bénéficiant des meilleures technologies, ainsi que des meilleurs équipements de laboratoire, de production et commerciaux, en employant du personnel expert à tous les niveaux.
En étant responsables de nos produits, nous avons pu les soutenir avec une bonne garantie.

Le dernier mot : Votre confiance est notre honneur

RENUOX OIL

Ultimate Quality Lubricant

Achievements:

With the adequate infrastructure it has created, including the establishment of a network of provincial sales agencies across the country and internationally, with its specialized export department, **Renuox Oil** has been able to supply its products in different types to domestic and foreign consumers. Asian and African countries including Kenya, Burkina Faso, Senegal, Mali, Uzbekistan, Kazakhstan, Kyrgyzstan, Afghanistan, Iraq, Oman and the European Union.

Relying on the technical knowledge of its expert staff in the Research and Development (R&D) and Marketing Development (RENUOX OIL INTERNATIONAL INC) units, the company has been able to supply about 100 products. Including: Petrol Engine Oil (Car and Motorcycle), Diesel, Gear Oil, Hydraulic, Octane Booster, Brake Oil, Grease, Antifreeze and Industrial and Marine Oils.

Standards and ISO:

Related Standards of Canada

ISO 9001 Certificate (Canada's global standard for quality management of products and services)
ISO 29001 Certificate (Canada's global standard for oil, gas and petrochemical industries)
ISO 14001 Certificate (Canada's global standard for environmental and environmental management)

Honours:

The uniqueness of the packaging in terms of design, execution and registration of the intellectual property of the packaging (WIPO The Hague) is another characteristic of the **Renuox Oil** brand and is registered in 49 countries, including: Canada, the United States, the European Union, the African Intellectual Property Organization and China.
In addition, **Renuox Oil** Company was able to take another step towards its presence in global markets and competition with other products by registering with the World Trade Organization in Madrid (WTO).
Another honor for **Renuox Oil** is winning the International Industrial Packaging Award in 2021 among twenty-one countries and among the largest and most prestigious international companies, which demonstrates the importance of quality in providing products to customers.

RENUOX OIL

Ultimate Quality Lubricant

Réalisations :

Grâce à l'infrastructure adéquate qu'elle a créée, y compris l'établissement d'un réseau d'agences de vente provinciales à travers le pays et à l'international, avec son département d'exportation spécialisé, **Renuox Oil** a pu fournir ses produits dans différents types aux consommateurs nationaux et étrangers. Les pays asiatiques et africains, y compris le Kenya, le Burkina Faso, le Sénégal, le Mali, l'Ouzbékistan, le Kazakhstan, le Kirghizistan, l'Afghanistan, l'Irak, Oman et l'Union européenne.

En s'appuyant sur les connaissances techniques de son personnel expert dans les unités de recherche et développement (R&D) et de développement marketing (RENUOX OIL INTERNATIONAL INC), l'entreprise a pu fournir environ 100 produits. Incluant : huile moteur essence (voiture et moto), diesel, huile de boîte de vitesses, hydraulique, booster d'octane, huile de frein, graisse, antigel et huiles industrielles et marines.

Normes et ISO :

Normes associées du Canada
Certificat de norme ISO 9001 (norme mondiale pour la gestion de la qualité des produits et services du Canada)
Certificat de norme ISO 29001 (norme mondiale pour les industries pétrolière, gazière et pétrochimique du Canada)
Certificat de norme ISO 14001 (norme mondiale pour la gestion environnementale et environnementale du Canada)

Honneurs :

L'unicité de l'emballage en termes de conception, d'exécution et d'enregistrement de la propriété intellectuelle de l'emballage (WIPO de La Haye) est une autre caractéristique de la marque **Renuox Oil** et est enregistrée dans 49 pays, y compris : le Canada, les États-Unis, l'Union européenne, l'Organisation africaine de la propriété intellectuelle et la Chine.
De plus, **Renuox Oil** Company a pu franchir une nouvelle étape vers sa présence sur les marchés mondiaux et la concurrence avec d'autres produits en s'enregistrant auprès de l'Organisation mondiale du commerce de Madrid (WTO).
Un autre honneur pour**Renuox Oil** est de remporter le prix international de l'emballage industriel en 2021 parmi vingt et un pays et parmi les plus grandes et prestigieuses entreprises internationales, ce qui démontre l'importance de la qualité dans la fourniture de produits aux clients.

Tabale Of Contents

1 Automotive Passenger Car Gasoline Engine Oil

34 Automotive Passenger Car Diesel Engine Oil

41 Antifreeze Anti Rust & Anti Buil

44 Motorcycle Oil Gasoline Engine Oil

51 AUTOMATIC TRANSMISSION FLUID

68 Passenger Car GEARBOX Oil

77 Automotive Heavy Duty Diesel Engine Oil

100 MARINE Diesel Engine Oil

105 HEAVY DUTY GEARBOX Oil

114 HYDRAULIC Oil

117 LITHIUM GREASE

120 OCTANE BOOSTER Gasoline Engine

123 BRAKE FLUID

RENUOX OIL

Ultimate Quality Lubricant

Automotive
Passenger Car

Gasoline Engine Oil





Automotive
Passenger Car
Gasoline Engine Oil

SP 0W-20 RADIUM LINE

FULLY SYNTHETIC



5 Liters | 4.5 Liters | **4 Liters** | 1 US Gallon | 3.5 Liters | 1 Liter

RENUOX OIL
Ultimate Quality Lubricant



SP 0W-20
RADIUM LINE

API:SP SAE:0W-20

Renuox Radium Line (Fully Synthetic) SP is a premium-quality synthetic engine oil specially formulated to provide superior protection and fuel efficiency for modern gasoline engines. It is manufactured according to the latest international standards and industry specifications. SP 0W-20 engine oil is recommended for modern gasoline vehicles requiring API SP performance with low-viscosity lubrication for enhanced fuel economy and engine responsiveness.

Advantages: • Outstanding fuel economy performance • Excellent engine protection against wear and deposits • Superior cold-start lubrication and low-temperature flow • Helps reduce sludge and varnish formation • High oxidation and thermal stability • Suitable for turbocharged and direct injection gasoline engines • Improves engine cleanliness and efficiency • Extended engine life and smoother performance

Properties	ASTM Test Method	0W-20
Viscosity cst 100°C	D-2270	8.5
Viscosity Index, Min	D-2299	175
Flash Point,°C	D-680	228
Pour Point,°C	D-92	-52
Density @ 15°C, kg/m³	D-1298	0.838
Total base number (mg KOH/g)	D-81	7.2

Specification Level:

API: SP ILSAC GF-6AACEA C5Ford WSS-M2C947-B1 / M2C962-A1GM dexos1 Gen 3Chrysler MS-6395Honda / Toyota / Nissan / Hyundai / Kia Compatible

API:SP SAE:0W-20

Renuox Radium Line (Entièrement synthétique), SP est une huile moteur synthétique haut de gamme spécialement formulée pour offrir une protection optimale et une consommation de carburant réduite aux moteurs essence modernes. Elle est fabriquée conformément aux normes internationales et aux spécifications industrielles les plus récentes. L'huile moteur SP 0W-20 est recommandée pour les véhicules essence modernes nécessitant une performance API SP et une lubrification à faible viscosité pour une consommation de carburant réduite et une meilleure réactivité du moteur.

Avantages: • Excellente économie de carburant • Protection moteur optimale contre l'usure et les dépôts • Lubrification supérieure au démarrage à froid et à basse température • Contribue à réduire la formation de boues et de vernis • Haute stabilité à l'oxydation et à la chaleur • Convient aux moteurs essence turbocompressés et à injection directe • Améliore la propreté et le rendement du moteur • Durée de vie du moteur prolongée et fonctionnement plus souple

Automotive
Passenger Car
Gasoline Engine Oil

SP 5W-30 AMBER LINE

FULLY SYNTHETIC



5 Liters | 4.5 Liters | **4 Liters** | 1 US Gallon | 3.5 Liters | 1 Liter

RENUOX OIL
Ultimate Quality Lubricant



SP 5W-30

AMBER LINE

API:SP SAE:5W-30

Renuox Amber Line (Synthetic Blend), Sp is a high-quality synthetic engine oil that provides excellent protection and performance for gasoline engines and is manufactured in accordance with the latest global standards and industry specifications.

SP 5W-30 engine oil is an excellent choice for gasoline vehicles that require API SP specifications.

Advantages: • Improved fuel economy • Greater engine protection against wear • Reduced engine deposits and prevents sludge formation • Excellent low temperature performance • Resistant to oxidation • Suitable for use in a variety of modern gasoline engines, including turbocharged engines • Increased engine efficiency and performance.

Properties	ASTM Test Method	5W-30
Viscosity cst 100°C	D-2270	11.2
Viscosity Index, Min	D-2299	185
Flash Point,°C	D-680	234
Pour Point,°C	D-92	-48
Density @ 15°C, kg/m³	D-1298	0.842
Total base number (mg KOH/g)	D-81	7.5

Specification Level:

API: SP ACEA C3, A5/B5, A3/B4 MB 229.5/229.6, 229.1
VW 508.00 / 509.00 / 504.00 / 507.00 BMW LL-04 Pprsche C30 RN0720

API:SP SAE:5W-30

Renuox Amber Line (Mélange Synthétique), est une huile moteur synthétique de haute qualité qui offre une protection et des performances excellentes pour les moteurs à essence et est fabriquée conformément aux dernières normes et spécifications mondiales de l'industrie. L'huile moteur SP 5W-30 est un excellent choix pour les véhicules à essence nécessitant des spécifications API SP.

Avantages: • Amélioration de l'économie de carburant • Meilleure protection du moteur contre l'usure • Réduction des dépôts dans le moteur et prévention de la formation de boues • Excellente performance à basse température • Résistance à l'oxydation • Convient à une variété de moteurs à essence modernes, y compris les moteurs turbocompressés • Augmentation de l'efficacité et des performances du moteur.

Automotive
Passenger Car
Gasoline Engine Oil

SP 5W-40 EMERALD LINE

FULLY SYNTHETIC



5 Liters | 4.5 Liters | 4 Liters | 1 US Gallon | 3.5 Liters | 1 Liter

RENUOX OIL
Ultimate Quality Lubricant



SP 5W-40

EMERALD LINE

API: SP SAE: 5W-40

Renuox Emerald Line (Synthetic Blend), A high-performance synthetic engine oil designed for use in modern gasoline engines and manufactured in accordance with the latest global standards and industry specifications and provides excellent protection and performance in a wide range of driving conditions. SP 5W-40 engine oil is an excellent choice for modern gasoline engines that require API SP specifications. Excellent protection, fuel efficiency performance are the special advantages of this engine oil. The low temperature in starting properties of this oil make it an ideal choice for cold weather conditions, while its high temperature characteristics ensure its reliable performance in hot weather conditions.

Advantages: • Improved fuel economy • Greater engine protection against wear • Reduced engine deposits and prevents sludge formation • Excellent low temperature performance • High temperature protection • Resistance to oxidation • Suitable for use in all types of turbocharged gasoline engines • Increased engine efficiency and performance.

Properties	ASTM Test Method	5W-40
Viscosity cst 100°C	D-2270	13.9
Viscosity Index, Min	D-2299	170
Flash Point,°C	D-680	230
Pour Point,°C	D-92	-36
Density @ 15°C, kg/m³	D-1298	850
Total base number (mg KOH/g)	D-81	10.2

Specification Level:

API: SP ACEA C3, A5/B5, A3/B4 MB 229.5/229.6, 229.1
VW 508.00 / 509.00 / 504.00 / 507.00 BMW LL-04 Pprsche C30 RN0720

API: SP SAE: 5W-40

Renuox Emerald Line (Mélange Synthétique), est une huile moteur synthétique haute performance conçue pour une utilisation dans les moteurs à essence modernes et fabriquée conformément aux dernières normes mondiales et spécifications de l'industrie, offrant une protection et des performances excellentes dans une large gamme de conditions de conduite. L'huile moteur SP 5W-40 est un excellent choix pour les moteurs à essence modernes nécessitant des spécifications API SP. Une protection exceptionnelle et des performances en matière d'économie de carburant sont les avantages particuliers de cette huile moteur. Les propriétés de démarrage à basse température de cette huile en font un choix idéal pour les conditions météorologiques froides, tandis que ses caractéristiques à haute température garantissent des performances fiables par temps chaud.

Avantages: • Amélioration de l'économie de carburant • Meilleure protection du moteur contre l'usure • Réduction des dépôts dans le moteur et prévention de la formation de boues • Excellentes performances à basse temperature • Protection à haute temperature • Résistance à l'oxydation • Adaptée à tous types de moteurs à essence turbocompressés • Augmentation de l'efficacité et des performances du moteur.

Automotive
Passenger Car
Gasoline Engine Oil

SP 10W-40 RUBY LINE

FULLY SYNTHETIC



5 Liters | 4.5 Liters | 4 Liters | 1 US Gallon | 3.5 Liters | 1 Liter

RENUOX OIL
Ultimate Quality Lubricant



SP 10W-40

RUBY LINE

API: SP SAE: 10W-40

Renuox Ruby Line (Synthetic Blend), A high-quality synthetic motor oil designed for use in modern gasoline engines. SP 10W-40 motor oil is an excellent choice for modern gasoline engines that require API SP specifications. It has a high viscosity and provides additional protection for engines operating in severe conditions or under heavy loads. It offers excellent protection and performance in a wide range of driving conditions and is manufactured in accordance with the latest industry standards and specifications. It offers excellent protection, performance and fuel efficiency and its low temperature starting properties make it an ideal choice for cold weather conditions, while its high temperature characteristics ensure reliable performance in hot weather conditions.

Advantages: • Excellent low temperature performance • Reduces engine deposits and prevents sludge formation • High temperature protection • Improves fuel economy • Resists oxidation • Suitable for use in turbocharged gasoline engines • Increases engine efficiency and performance • Greater engine protection against wear.

Properties	ASTM Test Method	10W-40
Viscosity cst 100°C	D-2270	14.5
Viscosity Index, Min	D-2299	150
Flash Point,°C	D-680	230
Pour Point,°C	D-92	-36
Density @ 15°C, kg/m³	D-1298	870
Total base number (mg KOH/g)	D-81	9.7

Specification Level:

API: SP ACEA C3, A5/B5, A3/B4 MB 229.5/229.6, 229.1
VW 508.00 / 509.00 / 504.00 / 507.00 BMW LL-04 Pprsche C30 RN0720

API: SP SAE: 10W-40

Renuox Ruby Line (Mélange Synthétique), est une huile moteur synthétique de haute qualité conçue pour les moteurs à essence modernes. L'huile moteur SP 10W-40 est un excellent choix pour les moteurs à essence modernes nécessitant des spécifications API SP. Elle a une viscosité élevée et offre une protection supplémentaire pour les moteurs fonctionnant dans des conditions sévères ou sous des charges lourdes. Elle offre une protection et des performances excellentes dans une large gamme de conditions de conduite et est fabriquée conformément aux dernières normes et spécifications de l'industrie. Elle offre une excellente protection, des performances et une efficacité énergétique et ses propriétés de démarrage à basse température en font un choix idéal pour les conditions météorologiques froides, tandis que ses caractéristiques à haute température garantissent des performances fiables par temps chaud.

Avantages: • Excellentes performances à basse température • Réduit les dépôts dans le moteur et la formation de boues • Protection à haute température • Améliore l'économie de carburant • Résiste à l'oxydation • Adaptée à une utilisation dans les moteurs à essence turbocompressés • Augmente l'efficacité et les performances du moteur • Meilleure protection du moteur contre l'usurey.

Automotive
Passenger Car
Gasoline Engine Oil

SN 0W-20 DIAMOND LINE

SYNTHETIC BLEND



5 Liters | 4.5 Liters | **4 Liters** | 1 US Gallon | 3.5 Liters | **1 Liter**

RENUOX OIL
Ultimate Quality Lubricant

SN 0W-20
DIAMOND LINE

API: SN SAE: 0W-20

Renuox Diamond Line (Synthetic Blend), is produced from the highest level of efficiency and the best group 3 and 4 synthetic base oil and the best additives in the world and is suitable for use in gasoline vehicles. This engine oil is suitable for new generation vehicles, hybrid models, turbocharged gasoline engines, and eco-fuels containing ethanol up to E85 and formulated in accordance with ILSAC GF-5 & GF-6 and API SN specifications. This engine oil is designed for modern and hybrid engines that require 0W-20 quality level oil.

Advantages: • It provides excellent protection against wear, deposits, and sludge formation • It has a very low viscosity, which allows it to flow easily at low temperatures and provide quick lubrication to engine components • It can help improve fuel economy and reduce emissions • It has excellent thermal stability and can withstand high temperatures without cracking or forming harmful deposits, meaning it maintains its viscosity over a wide range of temperatures.

Properties	ASTM Test Method	0W-20
Viscosity cst 100°C	D-2270	8.3
Viscosity Index, Min	D-2299	175
Flash Point,°C	D-680	230
Pour Point,°C	D-92	-48
Density @ 15°C, kg/m³	D-1298	840
Total base number (mg KOH/g)	D-81	8.5

Specification Level:

API: SN ILSAC: GF-5 GF-6

OEM Approvals:

Honda/Acura HTO-06 Toyota/Lexus Ford WSS-M2C947-A / B GM dexos1 Gen 2

API: SN SAE: 0W-20

Renuox Diamond Line (Mélange Synthétique), est produit à partir du plus haut niveau d'efficacité et des meilleures huiles de base synthétiques des groupes 3 et 4 et des meilleurs additifs au monde. Il est adapté à une utilisation dans les véhicules à essence. Cette huile moteur convient aux véhicules de nouvelle génération, aux modèles hybrides, aux moteurs à essence turbocompressés et aux carburants écologiques contenant de l'éthanol jusqu'à E85. Elle est formulée conformément aux spécifications ILSAC GF-5 & GF-6 et API SN. Cette huile moteur est conçue pour les moteurs modernes et hybrides qui nécessitent une huile de qualité 0W-20.

Avantages: • Elle offre une excellente protection contre l'usure, les dépôts et la formation de boues • Elle a une viscosité très faible, ce qui lui permet de s'écouler facilement à basse température et de lubrifier rapidement les composants du moteur • Elle peut aider à améliorer l'économie de carburant et à réduire les émissions • Elle a une excellente stabilité thermique et peut résister à des températures élevées sans se fissurer ni former de dépôts nocifs, ce qui signifie qu'elle maintient sa viscosité sur une large gamme de températures

Automotive
Passenger Car
Gasoline Engine Oil

SN 5W-30 GOLD LINE

SYNTHETIC BLEND



5 Liters	4.5 Liters	**4 Liters**	1 US Gallon	3.5 Liters	1 Liter

RENUOX OIL
Ultimate Quality Lubricant



SN 5W-30

GOLD LINE

API: SN SAE: 5W-30

Renuox Gold Line (Synthetic Blend), is prepared and produced from synthetic base oil and the highest global level additives and brings the best performance for turbocharged gasoline cars in hard working conditions with different types of weather and formulated in accordance with ILSAC GF-5 & GF-6 and API SN specifications.

Advantages: • The oil contains a special formulation that helps reduce engine wear and improve fuel efficiency and also includes detergents and dispersants to help keep the engine clean and prevent the formation of harmful deposits • The oil has good thermal stability and can withstand high temperatures without breaking down or forming harmful deposits • It has a higher viscosity index than conventional oils, which means it maintains its viscosity over a wider range of temperatures • It helps reducing engine noise and vibration, especially during cold starts • It provides good protection against engine wear and deposits • It can help improve fuel economy and reduce emissions.

Properties	ASTM Test Method	5W-30
Viscosity cst 100°C	D-2270	11.9
Viscosity Index, Min	D-2299	160
Flash Point,°C	D-680	220
Pour Point,°C	D-92	-45
Density @ 15°C, kg/m³	D-1298	870
Total base number (mg KOH/g)	D-81	10.0

Specification Level:

API: SN ILSAC GF-5 ACEA C3, A5/B5, A3/B4 MB 229.5/229.51
VW 504.00 / 507.00 / 508.00 / 509.00 BMW LL-04 Porsche C30

API: SN SAE: 5W-30

Renuox Gold Line (Mélange Synthétique), est préparée et produite à partir d'huile de base synthétique et des additifs de plus haut niveau mondial, et offre les meilleures performances pour les voitures à essence turbocompressées dans des conditions de travail difficiles et avec différents types de climat. Formulée conformément aux spécifications ILSAC GF-5 & GF-6 et API SN, cette huile moteur est conçue pour apporter une performance optimale.

Avantages: • L'huile contient une formulation spéciale qui aide à réduire l'usure du moteur et à améliorer l'efficacité énergétique. Elle comprend aussi des détergents et dispersants pour aider à garder le moteur propre et prévenir la formation de dépôts nocifs • Elle a une bonne stabilité thermique et peut résister à des températures élevées sans se décomposer ni former de dépôts nocifs • Elle possède un indice de viscosité plus élevé que les huiles conventionnelles, ce qui signifie qu'elle maintient sa viscosité sur une plus large gamme de températures • Elle aide à réduire le bruit et les vibrations du moteur, surtout lors des démarrages à froid • Elle offre une bonne protection contre l'usure et les dépôts dans le moteur • Elle peut aider à améliorer l'économie de carburant et à réduire les émissions

Automotive
Passenger Car
Gasoline Engine Oil

SN 5W-40
SILVER LINE
BLUE SILVER LINE
SYNTHETIC BLEND



5 Liters | 4.5 Liters | **4 Liters** | 1 US Gallon | 3.5 Liters | 1 Liter

RENUOX OIL
Ultimate Quality Lubricant

SN 5W-40

SILVER LINE
BLUE SILVER LINE

API: SN SAE: 5W-40

Renuox Silver & Blue Silver Line (Synthetic Blend), is prepared and produced from synthetic base oil and the highest world-class additives and brings the best performance for gasoline and turbocharged vehicles with hard work conditions and different types of weather and formulated in accordance with ILSAC GF-5 & GF-6 and API SN specifications.

Advantages: • It provides excellent protection against engine wear and deposits • This oil has a high viscosity and can be used in a wide range of vehicles that require high viscosity oil • It helps improve fuel economy and reduce emissions • It contains detergents and dispersants to keep the engine clean and prevent the formation of harmful deposits • It has good thermal stability and can withstand high temperatures without breaking down or forming harmful deposits.

Properties	ASTM Test Method	5W-40
Viscosity cst 100°C	D-2270	13.9
Viscosity Index, Min	D-2299	172
Flash Point,°C	D-680	225
Pour Point,°C	D-92	-36
Density @ 15°C, kg/m³	D-1298	0.852
Total base number (mg KOH/g)	D-81	10.0

Specification Level:

API: SN ILSAC GF-5 ACEA A3/B4 MB 229.5 VW 502.00 / 505.00
BMW LL-01 Pprsche A40 Renault RN 0700 / RN 0710 Fiat 9.55535-H2 /M2 / N2 / Z2

API: SN SAE: 5W-40

Renuox Silver & Blue Silver Line (Mélange Synthétique), est préparée et produite à partir d'huile de base synthétique et des additifs de classe mondiale les plus élevés, offrant les meilleures performances pour les véhicules à essence et turbocompressés dans des conditions de travail difficiles et différents types de climat. Formulée conformément aux spécifications ILSAC GF-5 & GF-6 et API SN, cette huile moteur est conçue pour apporter une performance optimale.

Avantages: • Elle offre une excellente protection contre l'usure du moteur et les dépôts • Cette huile a une haute viscosité et peut être utilisée dans une large gamme de véhicules nécessitant une huile de haute viscosité • Elle aide à améliorer l'économie de carburant et à réduire les émissions • Elle contient des détergents et des dispersants pour garder le moteur propre et prévenir la formation de dépôts nocifs • Elle a une bonne stabilité thermique et peut résister à des températures élevées sans se décomposer ni former de dépôts nocifs

Automotive
Passenger Car
Gasoline Engine Oil

SN 10W-40 BRONZE LINE MAGIC LINE

SYNTHETIC BLEND



5 Liters | 4.5 Liters | **4 Liters** | 1 US Gallon | 3.5 Liters | **1 Liter**

RENUOX OIL
Ultimate Quality Lubricant



SN 10W-40

BRONZE LINE
MAGIC LINE

API: SN SAE: 10W-40

Renuox Bronze Line - Magic Line (Synthetic Blend), is prepared and produced from the combination of high-quality first base and synthetic oil and the best additives in the world, and it is suitable for use in new generation gasoline cars and cars from 2011 onwards.

Advantages: • Excellent engine protection: It provides protection against wear, corrosion, and deposits, which helps extend engine life • Improved fuel economy: It is designed to improve fuel economy by reducing friction and improving engine efficiency • Enhanced performance: It provides excellent lubrication at high temperatures and under heavy loads, which helps maintain engine performance • Reduced emissions: It is formulated to reduce emissions and meet environmental standards • Compatibility: It is compatible with a wide range of engines and can be used in both new and older vehicles • This product has the best performance for the engine when starting at cold temperature.

Properties	ASTM Test Method	10W-40
Viscosity cst 100°C	D-2270	15.7
Viscosity Index, Min	D-2299	155
Flash Point,°C	D-680	220
Pour Point,°C	D-92	-33
Density @ 15°C, kg/m³	D-1298	0.870
Total base number (mg KOH/g)	D-81	10.0

Specification Level:

API: SN ACEA A3/B4 MB 229.3 VW 501.01 /505.00
BMW LL-01 Renault RN 0700 / RN 0710 PSA B71 2294

API: SN SAE: 10W-40

Renuox Bronze Line Magic Line (Mélange Synthétique), est préparée et produite à partir de la combinaison d'une huile de base de haute qualité et d'huile synthétique, ainsi que des meilleurs additifs au monde. Elle est adaptée à une utilisation dans les voitures à essence de nouvelle génération et les voitures à partir de 2011.

Avantages: • Protection excellente du moteur: elle offre une protection contre l'usure, la corrosion et les dépôts, ce qui aide à prolonger la durée de vie du moteur • Amélioration de l'économie de carburant: elle est conçue pour améliorer l'économie de carburant en réduisant les frictions et en augmentant l'efficacité du moteur • Performance améliorée: elle offre une excellente lubrification à haute température et sous de lourdes charges, ce qui aide à maintenir les performances du moteur • Réduction des émissions: elle est formulée pour réduire les émissions et répondre aux normes environnementales • Compatibilité: elle est compatible avec une large gamme de moteurs et peut être utilisée dans des véhicules neufs et anciens • Ce produit offre la meilleure performance pour le moteur lors des démarrages à froid.

Automotive
Passenger Car
Gasoline Engine Oil

SN 15W-40 POWER LINE

SYNTHETIC BLEND





5 Liters | 4.5 Liters | **4 Liters** | 1 US Gallon | 3.5 Liters | 1 Liter

RENUOX OIL
Ultimate Quality Lubricant



SN 15W-40

POWER LINE

API:SN SAE:15W-40

Renuox Power Line (Synthetic Blend) SN 15W-40 is a high-performance engine oil formulated with premium base oils and advanced additive technology to provide excellent protection, cleanliness, and durability for modern gasoline engines.

It is designed to deliver reliable lubrication and engine protection under various driving conditions while helping reduce engine wear, deposits, and oxidation. Suitable for naturally aspirated and turbocharged gasoline engines requiring API SN performance.

Advantages: • Excellent protection against engine wear and corrosion • Helps reduce sludge and harmful deposits • High thermal and oxidation stability • Reliable lubrication under high-temperature conditions • Improves engine cleanliness and efficiency • Smooth engine operation and reduced friction • Suitable for a wide range of gasoline engines • Helps extend engine life and maintain performance

Properties	ASTM Test Method	15W-40
Viscosity cst 100°C	D-2270	14.6
Viscosity Index, Min	D-2299	148
Flash Point,°C	D-680	236
Pour Point,°C	D-92	-30
Density @ 15°C, kg/m³	D-1298	0.864
Total base number (mg KOH/g)	D-81	8.7

Specification Level:

API: SN ACEA A3/B4 MB 229.1 VW 501.01 / 505.00 Renault RN0700 BMW Special Oil Compatible

API:SN SAE:15W-40

Renuox Power Line (Mélange Synthétique), L'huile SN 15W-40 est une huile moteur haute performance formulée à partir d'huiles de base de première qualité et d'une technologie d'additifs avancée. Elle offre une protection, une propreté et une durabilité exceptionnelles aux moteurs à essence modernes.

Elle est conçue pour assurer une lubrification fiable et une protection optimale du moteur dans diverses conditions de conduite, tout en contribuant à réduire l'usure, les dépôts et l'oxydation. Elle convient aux moteurs à essence atmosphériques et turbocompressés nécessitant une performance API SN.

Avantages: • Excellente protection contre l'usure et la corrosion du moteur • Contribue à réduire les boues et les dépôts nocifs • Haute stabilité thermique et à l'oxydation • Lubrification fiable même à haute température • Améliore la propreté et le rendement du moteur • Fonctionnement moteur plus fluide et friction réduite • Convient à une large gamme de moteurs à essence • Contribue à prolonger la durée de vie du moteur et à maintenir ses performances

Automotive
Passenger Car
Gasoline Engine Oil

SM 5W-30 EXTRA DRIVE

SYNTHETIC BLEND



5 Liters | 4.5 Liters | **4 Liters** | 1 US Gallon | 3.5 Liters | 1 Liter

RENUOX OIL
Ultimate Quality Lubricant



SM 5W-30
EXTRA DRIVE

API:SM SAE:5W-30

Renuox Extra Drive (Synthetic Blend) SM 5W-30 is a high-quality synthetic engine oil designed to provide excellent engine protection, fuel economy, and long-lasting performance for modern gasoline engines.

Its advanced formulation helps minimize wear, reduce deposits, and maintain engine cleanliness under both city and highway driving conditions. Recommended for vehicles requiring API SM and SAE 5W-30 engine oil.

Advantages: • Improved fuel economy performance • Excellent engine wear protection • Superior low-temperature fluidity • Helps prevent sludge and deposit formation • High resistance to oxidation and thermal breakdown • Smooth engine performance and reduced friction • Suitable for modern gasoline engines • Enhanced engine cleanliness and durability

Properties	ASTM Test Method	5W-30
Viscosity cst 100°C	D-2270	11
Viscosity Index, Min	D-2299	162
Flash Point,°C	D-680	228
Pour Point,°C	D-92	-39
Density @ 15°C, kg/m³	D-1298	0.848
Total base number (mg KOH/g)	D-81	8.4

Specification Level:

API: SM ACEA A5/B5 ILSAC GF-4 Ford WSS-M2C913-C GM dexos1 Compatible Chrysler MS-6395

API:SM SAE:5W-30

Renuox Extra Drive (Mélange synthétique), SM 5W-30 est une huile moteur synthétique de haute qualité conçue pour offrir une excellente protection, une consommation de carburant réduite et des performances durables aux moteurs essence modernes.

Sa formulation avancée contribue à minimiser l'usure, à réduire les dépôts et à maintenir la propreté du moteur en conditions de conduite urbaines et routières. Recommandée pour les véhicules nécessitant une huile moteur API SM et SAE 5W-30.

Avantages: • Consommation de carburant réduite • Excellente protection contre l'usure du moteur • Fluidité supérieure à basse température • Prévient la formation de boues et de dépôts • Haute résistance à l'oxydation et à la dégradation thermique • Fonctionnement moteur souple et friction réduite • Convient aux moteurs essence modernes • Propreté et durabilité du moteur améliorées

Automotive
Passenger Car
Gasoline Engine Oil

SM 5W-40 EXTRA TURBO

SYNTHETIC BLEND



5 Liters | 4.5 Liters | **4 Liters** | 1 US Gallon | 3.5 Liters | 1 Liter

RENUOX OIL
Ultimate Quality Lubricant



SM 5W-40
EXTRA TURBO

API:SM SAE:5W-40

Renuox Extra Turbo (Synthetic Blend) SM 5W-40 is a premium synthetic engine oil formulated to provide reliable protection, engine cleanliness, and stable performance for modern gasoline engines under a wide range of operating conditions.

It delivers excellent lubrication during cold starts and high-temperature operation while helping reduce wear, sludge formation, and engine deposits. Suitable for naturally aspirated and turbocharged gasoline engines requiring API SM performance.

Advantages: • Excellent engine wear protection • High thermal and oxidation stability • Outstanding low-temperature performance • Helps reduce sludge and piston deposits • Smooth engine operation and reduced friction • Improved engine cleanliness and durability • Suitable for turbocharged gasoline engines • Reliable protection in severe driving conditions

Properties	ASTM Test Method	5W-40
Viscosity cst 100°C	D-2270	14.1
Viscosity Index, Min	D-2299	168
Flash Point,°C	D-680	234
Pour Point,°C	D-92	-42
Density @ 15°C, kg/m³	D-1298	0.852
Total base number (mg KOH/g)	D-81	8.9

Specification Level:

API: SM ACEA A3/B4 MB 229.3 VW 502.00 / 505.00 BMW LL-01 Renault RN0700 / RN0710

API:SM SAE:5W-40

Renuox Extra Turbo (Mélange synthétique), SM 5W-40 est une huile moteur synthétique haut de gamme formulée pour assurer une protection fiable, une propreté moteur optimale et des performances stables aux moteurs essence modernes, quelles que soient les conditions d'utilisation.

Elle offre une excellente lubrification lors des démarrages à froid et à haute température, tout en contribuant à réduire l'usure, la formation de boues et les dépôts dans le moteur. Elle convient aux moteurs essence atmosphériques et turbocompressés nécessitant une performance API SM.

Avantages: • Excellente protection contre l'usure du moteur • Haute stabilité thermique et à l'oxydation • Performances exceptionnelles à basse température • Contribue à réduire les boues et les dépôts sur les pistons • Fonctionnement moteur souple et friction réduite • Amélioration de la propreté et de la durabilité du moteur • Convient aux moteurs essence turbocompressés • Protection fiable dans des conditions de conduite difficiles

Automotive
Passenger Car
Gasoline Engine Oil

SM 10W-40 EXTRA POWER

SYNTHETIC BLEND



5 Liters	4.5 Liters	4 Liters	1 US Gallon	3.5 Liters	1 Liter

RENUOX OIL
Ultimate Quality Lubricant



SM 10W-40

EXTRA POWER

API: SM SAE: 10W-40

Renuox Extra Power (Synthetic Blend), is produced from the first and synthetic base oil along with the latest additives in the world and is designed for all types of modern gasoline cars with 16 and 24 valves with excellent lubrication.

Advantages: • Good wear protection: The oil is formulated to provide good wear protection and reduce engine wear • Improved fuel efficiency: The oil is designed to reduce friction and improve fuel efficiency • Enhanced oxidation stability: The synthetic blend formula provides enhanced oxidation stability to help protect against sludge and varnish formation. • Low-temperature performance: The oil provides good low-temperature performance to help with cold starts and improved fuel economy • Reduced emissions: The oil is formulated to help reduce emissions and meet environmental standards. • Good engine cleanliness: The oil helps keep engines clean and prevent the formation of harmful deposits

Properties	ASTM Test Method	10W-40
Viscosity cst 100°C	D-2270	15.7
Viscosity Index, Min	D-2299	155
Flash Point,°C	D-680	220
Pour Point,°C	D-92	33-
Density @ 15°C, kg/m³	D-1298	0.870
Total base number (mg KOH/g)	D-81	10.0

Specification Level:

API: SM ILSAC GF-4 JASO MA2 ACEA A3 / B4 MB 229.3
VW 501.01 / 505.00 Renault RN 0700 / RN 710 Fiat 9.55535-D2

API: SM SAE: 10W-40

Renuox Extra Power (Mélange Synthétique), est produit à partir d'huile de base synthétique de première qualité et des derniers additifs au monde. Elle est conçue pour tous les types de voitures à essence modernes avec 16 et 24 soupapes assurant une excellente lubrification.

Avantages: • Bonne protection contre l'usure: l'huile est formulée pour offrir une bonne protection contre l'usure et réduire l'usure du moteur • Amélioration de l'efficacité énergétique: l'huile est conçue pour réduire les frictions et améliorer l'efficacité énergétique • Stabilité à l'oxydation renforcée: la formule du mélange synthétique offre une stabilité à l'oxydation renforcée pour aider à protéger contre la formation de boues et de vernis • Performance à basse température: l'huile offre de bonnes performances à basse température pour aider lors des démarrages à froid et améliorer l'économie de carburant • Réduction des émissions: l'huile est formulée pour aider à réduire les émissions et répondre aux normes environnementales • Propreté du moteur: l'huile aide à garder les moteurs propres et à prévenir la formation de dépôts nocifs.

Automotive
Passenger Car
Gasoline Engine Oil

SM 15W-40 EXTRA FORCE

SYNTHETIC BLEND



5 Liters | 4.5 Liters | **4 Liters** | 1 US Gallon | 3.5 Liters | 1 Liter

RENUOX OIL
Ultimate Quality Lubricant



SM 15W-40
EXTRA FORCE

API:SM SAE:15W-40

Renuox Extra Force (Synthetic Blend) SM is a high-performance engine oil designed to provide reliable protection and long engine life for gasoline engines operating under a wide range of driving conditions. Manufactured using quality base oils and advanced additive technology, it meets modern industry standards for performance and durability.SM 15W-40 engine oil is suitable for gasoline-powered passenger cars and light-duty vehicles requiring API SM performance levels. It delivers dependable lubrication, engine cleanliness, and wear protection in both high and low operating temperatures.

Advantages: • Excellent engine protection against wear and corrosion• Helps reduce engine sludge and harmful deposits• Good thermal and oxidation stability• Reliable performance in high-temperature conditions• Improved engine cleanliness and durability• Smooth engine operation and reduced friction• Suitable for a wide range of gasoline engines• Helps extend engine service life

Properties	ASTM Test Method	15W-40
Viscosity cst 100°C	D-2270	14.5
Viscosity Index, Min	D-2299	145
Flash Point,°C	D-680	235
Pour Point,°C	D-92	-30
Density @ 15°C, kg/m³	D-1298	0.865
Total base number (mg KOH/g)	D-81	8.5

Specification Level:

API: SMACEA A3/B3MB 229.1VW 501.01 / 505.00

API:SM SAE:15W-40

Renuox Extra Force (mélange synthétique) SM est une huile haute performance conçue pour assurer une protection fiable et une longue durée de vie aux moteurs à essence fonctionnant dans des conditions de conduite variées. Fabriquée à partir d'huiles de base de qualité et d'une technologie d'additifs de pointe, elle répond aux normes industrielles modernes en matière de performance et de durabilité. L'huile moteur SM 15W-40 convient aux voitures particulières et aux véhicules utilitaires légers à essence nécessitant un niveau de performance API SM. Elle assure une lubrification fiable, une propreté moteur optimale et une protection contre l'usure, aussi bien à hautes qu'à basses températures de fonctionnement.

Avantages: • Excellente protection du moteur contre l'usure et la corrosion • Contribue à réduire les dépôts et les encrassements du moteur • Bonne stabilité thermique et à l'oxydation • Performances fiables même à haute température • Amélioration de la propreté et de la durabilité du moteur • Fonctionnement moteur plus fluide et réduction des frottements • Convient à une large gamme de moteurs à essence • Contribue à prolonger la durée de vie du moteur

Automotive
Passenger Car
Gasoline Engine Oil

SL 10W-40 POWER FULL

SYNTHETIC BLEND



5 Liters | 4.5 Liters | 4 Liters | **1 US Gallon** | **3.5 Liters** | 1 Liter

RENUOX OIL
Ultimate Quality Lubricant



SL 10W-40
POWER FULL

API: SL SAE: 10W-40

Renuox Power Full (Synthetic Blend), is a combination of the best first and synthetic base oil and the world's most reliable additives. This engine oil is suitable for gasoline, gas, light diesel passenger cars and all types of modern turbocharged and supercharged engines for which API:SL performance level is recommended. The great increase in motor life is one of the most prominent features of this product.

Advantages: • Excellent wear protection: The oil is formulated to provide excellent protection against engine wear, even in severe operating conditions • Improved fuel efficiency: The oil is designed to reduce friction and improve fuel efficiency, helping to save you money at the pump • Enhanced oxidation stability: The synthetic blend formula provides enhanced oxidation stability to help protect against sludge and varnish formation • Low-temperature performance: The oil provides good low-temperature performance, making it ideal for cold weather conditions • Good engine cleanliness: The oil helps keep engines clean and prevent the formation of harmful deposits.

Properties	ASTM Test Method	10W-40
Viscosity cst 100°C	D-2270	15
Viscosity Index, Min	D-2299	160
Flash Point,°C	D-680	210
Pour Point,°C	D-92	30-
Density @ 15°C, kg/m³	D-1298	0.864
Total base number (mg KOH/g)	D-81	10.0

Specification Level:

API: SL/CF
ACEA A 3-98 B 3-98
MB 229.1
VW 500.00 / 501.01 / 505.00
Renault RN 0700 / RN 0710
Fiat 9.55535-D2

API: SL SAE: 10W-40

Renuox Power Full (Mélange synthétique), est une combinaison des meilleures huiles de base premières et synthétiques et des additifs les plus fiables au monde. Cette huile moteur est adaptée aux voitures de tourisme à essence, gaz, diesel léger et à tous types de moteurs modernes suralimentés et turbocompressés pour lesquels le niveau de performance API:SL est recommandé. L'augmentation considérable de la durée de vie du moteur est l'une des caractéristiques les plus marquantes de ce produit.

Avantages: • Excellente protection contre l'usure: L'huile est formulée pour fournir une protection exceptionnelle contre l'usure du moteur, même dans des conditions de fonctionnement sévères. • Efficacité énergétique améliorée: L'huile est conçue pour réduire les frictions et améliorer l'efficacité énergétique, vous aidant ainsi à économiser de l'argent à la pompe • Stabilité à l'oxydation renforcée: La formule de mélange synthétique offre une stabilité à l'oxydation accrue pour aider à protéger contre la formation de boues et de vernis • Performance par basse température: L'huile offre une bonne performance par basse température, ce qui la rend idéale pour les conditions météorologiques froides • Propreté du moteur: L'huile aide à maintenir les moteurs propres et à prévenir la formation de dépôts nocifs.

Automotive
Passenger Car
Gasoline Engine Oil

SL 20W-50 POWER FULL

HIGH QUALITY PRODUCT



5 Liters | **4.5 Liters** | **4 Liters** | 1 US Gallon | 3.5 Liters | **1 Liter**

RENUOX OIL
Ultimate Quality Lubricant



SL 20W-50
POWER FULL

API: SL SAE: 20W-50

Renuox Power Full High Quality Product, is prepared and produced with a combination of first base oil (mineral) and high-quality additives for modern high-power, multi-valve, turbocharged and supercharged gasoline cars and brings the best performance in protecting the car engine.

Advantages: • Excellent wear protection: The oil is formulated to provide outstanding protection against engine wear, even under severe operating conditions • High-temperature protection: The oil provides excellent protection against high-temperature deposits, helping to extend engine life • Enhanced oxidation stability: The oil is formulated to resist oxidation, which helps prevent the formation of sludge and varnish • Low-temperature performance: The oil provides good low-temperature performance, helping to improve cold starts and fuel economy • Wide temperature range: The oil is suitable for use in a wide range of temperatures, making it ideal for use in both hot and cold climates • Good engine cleanliness: The oil helps keep engines clean and prevent the formation of harmful deposits

Properties	ASTM Test Method	20W-50
Viscosity cst 100°C	D-2270	19
Viscosity Index, Min	D-2299	120
Flash Point,°C	D-680	225
Pour Point,°C	D-92	-24
Density @ 15°C, kg/m³	D-1298	0.890
Total base number (mg KOH/g)	D-81	10.0

Specification Level:

API: SL/CF
ACEA A 3-98 B 3-98
MB 229.1
VW 500.00 / 501.01 / 505.00
Renault RN 0700
Fiat 9.55535-D2

API: SL SAE: 20W-50

Renuox Power Full,est préparé et produit avec une combinaison d'huile de base (minérale) de première qualité et d'additifs de haute qualité pour les voitures à essence modernes à haute puissance, multi-soupapes, turbocompressées et suralimentées, offrant les meilleures performances pour protéger le moteur de la voiture.

Avantages: • Excellente protection contre l'usure: L'huile est formulée pour fournir une protection exceptionnelle contre l'usure du moteur, même dans des conditions de fonctionnement sévères • Protection à haute température: L'huile offre une excellente protection contre les dépôts à haute température, aidant à prolonger la durée de vie du moteur • Stabilité à l'oxydation renforcée: L'huile est formulée pour résister à l'oxydation, ce qui aide à prévenir la formation de boues et de vernis • Performance à basse température: L'huile offre de bonnes performances à basse température, aidant à améliorer les démarrages à froid et l'efficacité énergétique • Large gamme de températures: L'huile est adaptée à une large gamme de températures, la rendant idéale pour une utilisation dans des climats chauds et froids • Propreté du moteur: L'huile aide à maintenir les moteurs propres et à prévenir la formation de dépôts nocifs

Automotive
Passenger Car
Gasoline Engine Oil

SJ 20W-50 ULTRA PLATINUM

HIGH QUALITY PRODUCT



5 Liters | 4.5 Liters | 4 Liters | 1 US Gallon | **3.5 Liters** | 1 Liter

RENUOX OIL
Ultimate Quality Lubricant



SJ 20W-50
ULTRA PLATINUM

API: SJ SAE: 20W-50

Renuox Ultra Platinum High Quality Product, is prepared and produced from the first base oil (mineral) and the best additives in the world, and it brings the highest protection of the engine of gasoline cars until 2004, diesel and supercharged in hard working conditions.

Advantages: • Good wear protection: The oil provides good protection against engine wear, helping to extend engine life • High-temperature protection: The oil is formulated to protect against high-temperature deposits, which can cause engine damage • Enhanced oxidation stability: The oil is designed to resist oxidation, which helps prevent the formation of sludge and varnish • Low-temperature performance: The oil provides good-temperature performance, helping to improve cold starts and fuel economy • Wide temperature range: The oil is suitable for use in a wide range of temperatures, making it ideal for use in both hot and cold climates • Compatibility with most gasoline engines: The oil is suitable for use in most gasoline engines, including older engines • Good engine cleanliness: The oil helps keep engines clean and prevent the formation of harmful deposits.

Properties	ASTM Test Method	20W-50
Viscosity cst 100°C	D-2270	19
Viscosity Index, Min	D-2299	120
Flash Point,°C	D-680	225
Pour Point,°C	D-92	-24
Density @ 15°C, kg/m³	D-1298	0.892
Total base number (mg KOH/g)	D-81	9.0

Specification Level:

API: SJ/CF4/CF
ACEA A 3-98 B 3-98 E 2-96
MB 228.1 / 229.1
VW 500.00 / 501.01 / 505.00
Fiat 9.55535-D2

API: SJ SAE: 20W-50

Renuox Ultra Platinum,est préparé et produit à partir de la première huile de base (minérale) et des meilleurs additifs au monde, et il offre la meilleure protection du moteur des voitures à essence jusqu'en 2004, diesel et suralimentées, dans des conditions de travail difficiles.

Avantages: • Bonne protection contre l'usure: L'huile offre une bonne protection contre l'usure du moteur, aidant à prolonger la durée de vie du moteur • Protection à haute température: L'huile est formulée pour protéger contre les dépôts à haute température, qui peuvent causer des dommages au moteur • Stabilité à l'oxydation améliorée: L'huile est conçue pour résister à l'oxydation, ce qui aide à prévenir la formation de boues et de vernis • Performance à basse température: L'huile offre une bonne performance à basse température, aidant à améliorer les démarrages à froid et l'efficacité énergétique • Large gamme de températures: L'huile est adaptée à une large gamme de températures, la rendant idéale pour une utilisation dans des climats chauds et froids • Compatibilité avec la plupart des moteurs à essence: L'huile est adaptée à une utilisation dans la plupart des moteurs à essence, y compris les anciens moteurs • Propreté du moteur: L'huile aide à maintenir les moteurs propres et à prévenir la formation de dépôts nocifs

RENUOX OIL

Ultimate Quality Lubricant



Diesel Engine oil

Automotive
Passenger Car



Automotive
Passenger Car
Diesel Engine Oil

CK-4 0W-30
MAGIC FLOW SYNTHETIC BLEND



5 Liters | 4.5 Liters | **4 Liters** | 1 US Gallon | 3.5 Liters | 1 Liter

RENUOX OIL
Ultimate Quality Lubricant



CK-4 0W-30

MAGIC FLOW

API:ck-4 SAE:0W-30

Renuox Magic Flow (Synthetic Blend) CK-4 0W-30 is a fully synthetic heavy-duty diesel engine oil developed to provide advanced engine protection, fuel economy, and long drain performance in modern diesel engines equipped with EGR, DPF, and SCR emission systems. Designed for severe operating conditions, it delivers excellent low-temperature performance and enhanced wear protection for on-road and off-road diesel applications.

Advantages: • Excellent cold-start performance• Superior wear and soot control • Outstanding oxidation stability • Extended drain interval capability • Compatible with modern emission control systems • Improved fuel economy performance • Reduces sludge and piston deposits• High thermal stability under heavy loads

Properties	ASTM Test Method	0W-30
Viscosity cst 100°C	D-2270	11.8
Viscosity Index, Min	D-2299	175
Flash Point,°C	D-680	230
Pour Point,°C	D-92	-48
Density @ 15°C, kg/m³	D-1298	0.842
Total base number (mg KOH/g)	D-81	10

Specification Level:

CK-4ACEA E6 / E9Volvo VDS-4.5MB 228.31 / 228.51MAN M3477Cummins CES 20086Detroit Diesel DFS 93K222

API:Ck-4 SAE:0W-30

Renuox Magic Flow (Mélange synthétique), CK-4 0W-30. L'huile moteur Renoux Amber Line CK-4 0W-30 est une huile synthétique haute performance pour moteurs diesel, conçue pour une protection moteur optimale, une consommation de carburant réduite et une durée de vie prolongée. Elle est idéale pour les moteurs diesel modernes équipés de systèmes EGR, DPF et SCR. Conçue pour les conditions d'utilisation les plus extrêmes, elle offre d'excellentes performances à basse température et une protection renforcée contre l'usure pour les applications diesel routières et hors route.

Avantages: • Excellentes performances au démarrage à froid • Maîtrise supérieure de l'usure et de la suie • Stabilité exceptionnelle à l'oxydation • Intervalle de vidange prolongé • Compatible avec les systèmes de contrôle des émissions modernes • Consommation de carburant améliorée • Réduction des boues et des dépôts sur les pistons • Haute stabilité thermique sous fortes charges

Automotive
Passenger Car
Diesel Engine Oil

CK-4 0W-30
MAGIC FLOW SYNTHETIC BLEND



5 Liters | 4.5 Liters | **4 Liters** | 1 US Gallon | 3.5 Liters | 1 Liter

RENUOX OIL
Ultimate Quality Lubricant



CK-4 0W-30

MAGIC FLOW

API:ck-4 SAE:0W-30

Renuox Magic Flow (Synthetic Blend) CK-4 0W-30 is a fully synthetic heavy-duty diesel engine oil developed to provide advanced engine protection, fuel economy, and long drain performance in modern diesel engines equipped with EGR, DPF, and SCR emission systems. Designed for severe operating conditions, it delivers excellent low-temperature performance and enhanced wear protection for on-road and off-road diesel applications.

Advantages: • Excellent cold-start performance• Superior wear and soot control • Outstanding oxidation stability • Extended drain interval capability • Compatible with modern emission control systems • Improved fuel economy performance • Reduces sludge and piston deposits• High thermal stability under heavy loads

Properties	ASTM Test Method	0W-30
Viscosity cst 100°C	D-2270	11.8
Viscosity Index, Min	D-2299	175
Flash Point,°C	D-680	230
Pour Point,°C	D-92	-48
Density @ 15°C, kg/m³	D-1298	0.842
Total base number (mg KOH/g)	D-81	10

Specification Level:

CK-4ACEA E6 / E9Volvo VDS-4.5MB 228.31 / 228.51MAN M3477Cummins CES 20086Detroit Diesel DFS 93K222

API:Ck-4 SAE:0W-30

Renuox Magic Flow (Mélange synthétique), CK-4 0W-30. L'huile moteur Renoux Amber Line CK-4 0W-30 est une huile synthétique haute performance pour moteurs diesel, conçue pour une protection moteur optimale, une consommation de carburant réduite et une durée de vie prolongée. Elle est idéale pour les moteurs diesel modernes équipés de systèmes EGR, DPF et SCR. Conçue pour les conditions d'utilisation les plus extrêmes, elle offre d'excellentes performances à basse température et une protection renforcée contre l'usure pour les applications diesel routières et hors route.

Avantages: • Excellentes performances au démarrage à froid • Maîtrise supérieure de l'usure et de la suie • Stabilité exceptionnelle à l'oxydation • Intervalle de vidange prolongé • Compatible avec les systèmes de contrôle des émissions modernes • Consommation de carburant améliorée • Réduction des boues et des dépôts sur les pistons • Haute stabilité thermique sous fortes charges

Automotive
Passenger Car
Diesel Engine Oil

CK-4 5W-40
DINAMIC POWER
SYNTHETIC BLEND



5 Liters | 4.5 Liters | 4 Liters | 1 US Gallon | 3.5 Liters | **1 Liter**

RENUOX OIL
Ultimate Quality Lubricant



CK-4 5W-40

DINAMIC POWER

API:CK-4 SAE:5W-40

Renuox Dinamic Power (Synthetic Blend) CK-4 5W-40 is a premium synthetic heavy-duty diesel engine oil formulated for excellent protection and performance in modern diesel engines operating under severe conditions. It provides superior soot handling, wear protection, and oxidation resistance while supporting extended oil drain intervals and emission system durability.

Advantages: • Excellent engine cleanliness • Superior protection against wear and deposits • High-temperature oxidation stability • Outstanding low-temperature fluidity • Supports extended drain intervals• Compatible with DPF and SCR systems• Reduces engine sludge formation • Reliable heavy-load performance

Properties	ASTM Test Method	5W-40
Viscosity cst 100°C	D-2270	14.2
Viscosity Index, Min	D-2299	170
Flash Point,°C	D-680	236
Pour Point,°C	D-92	-42
Density @ 15°C, kg/m³	D-1298	0.850
Total base number (mg KOH/g)	D-81	10.5

Specification Level:

API: CK-4 ACEA E7/E9 Volvo VDS-4.5 MB 228.31 MAN M3775 Cummins CES 20086 CAT ECF-3 Detroit Diesel DFS 93K222

API:Ck-4 SAE: 5W-40

Renuox Dinamic Power (Mélange synthétique), API : CK-4 SAE : 5W-40. L'huile moteur Renoux Amber Line CK-4 5W-40 est une huile synthétique haut de gamme pour moteurs diesel à usage intensif, formulée pour une protection et des performances optimales des moteurs diesel modernes fonctionnant dans des conditions extrêmes. Elle assure une gestion supérieure des suies, une protection contre l'usure et une résistance à l'oxydation, tout en permettant d'espacer les vidanges et d'améliorer la durabilité du système d'échappement.

Avantages: • Excellente propreté du moteur • Protection supérieure contre l'usure et les dépôts • Stabilité à l'oxydation à haute température • Fluidité exceptionnelle à basse température • Permet d'espacer les vidanges • Compatible avec les systèmes DPF et SCR • Réduit la formation de boues dans le moteur • Performances fiables sous forte charge



Automotive
Passenger Car
Diesel Engine Oil

CK-4 10W-40
MAGIC POWER
SYNTHETIC BLEND



5 Liters | 4.5 Liters | 4 Liters | 1 US Gallon | 3.5 Liters | 1 Liter

RENUOX OIL
Ultimate Quality Lubricant



CK-4 10W-40

MAGIC POWER

API:CK-4 SAE:10W-40

Renuox Magic Power (Synthetic Blend) CK-4 10W-40 is a high-performance synthetic blend diesel engine oil designed for heavy-duty diesel engines requiring advanced protection, durability, and emission system compatibility. The formulation ensures reliable lubrication, reduced wear, and enhanced engine cleanliness in demanding driving and operating environments.

Advantages: • Strong protection against engine wear• Excellent soot dispersion performance• High resistance to oxidation and thermal breakdown• Suitable for extended drain intervals• Maintains engine cleanliness• Protects turbocharged diesel engines• Reliable performance in heavy-duty applications• Compatible with modern after-treatment systems

Properties	ASTM Test Method	10W-40
Viscosity cst 100°C	D-2270	14.8
Viscosity Index, Min	D-2299	160
Flash Point,°C	D-680	234
Pour Point,°C	D-92	-36
Density @ 15°C, kg/m³	D-1298	0.855
Total base number (mg KOH/g)	D-81	10.2

Specification Level:

API: CK-4 ACEA E7/E9 MB 228.31 Volvo VDS-4.5 Cummins CES 20086 MAN M3575 Renault RLD-4CAT ECF-3

API:CK-4 SAE: 10W-40

Renuox Magic Power (Mélange synthétique), API : CK-4 SAE : 10W-40. L'huile moteur Renoux Amber Line CK-4 10W-40 est une huile semi-synthétique haute performance conçue pour les moteurs diesel à usage intensif exigeant une protection avancée, une grande durabilité et une compatibilité avec les systèmes d'émission. Sa formulation assure une lubrification fiable, une usure réduite et une propreté moteur optimale, même dans des conditions de conduite et d'utilisation difficiles.

Avantages: • Protection renforcée contre l'usure du moteur • Excellente dispersion des suies • Haute résistance à l'oxydation et à la dégradation thermique • Convient aux intervalles de vidange prolongés • Maintient la propreté du moteur • Protège les moteurs diesel turbocompressés • Performances fiables pour les applications intensives • Compatible avec les systèmes de post-traitement modernes

Automotive
Passenger Car
Diesel Engine Oil

CK-4 15W-40
POWER GLAMOUR

SYNTHETIC BLEND



5 Liters | 4.5 Liters | **4 Liters** | 1 US Gallon | 3.5 Liters | 1 Liter

RENUOX OIL
Ultimate Quality Lubricant



CK-4 15W-40

MAGIC POWER

API:CK-4 SAE:15W-40

Renuox Power Glamour (Synthetic Blend) CK-4 15W-40 is a high-quality heavy-duty diesel engine oil engineered to provide maximum engine protection and durability for modern diesel engines operating under severe service conditions. It offers excellent soot control, wear protection, and thermal stability while supporting the performance of modern exhaust after-treatment systems.

Advantages: • Excellent wear and corrosion protection• Superior soot and deposit control• High oxidation stability• Reliable high-temperature performance• Supports long engine life• Compatible with EGR, DPF, and SCR systems• Reduces piston deposits and sludge formation• Suitable for heavy-duty commercial applications

Properties	ASTM Test Method	15W-40
Viscosity cst 100°C	D-2270	14.6
Viscosity Index, Min	D-2299	148
Flash Point,°C	D-680	236
Pour Point,°C	D-92	-30
Density @ 15°C, kg/m³	D-1298	0.864
Total base number (mg KOH/g)	D-81	8.7

Specification Level:

API: CK-4 ACEA E7/E9 Volvo VDS-4.5 MB 228.31 Cummins CES 20086 MAN M3775 CAT ECF-3 Detroit Diesel DFS 93K222

API:CK-4 SAE: 15W-40

Renuox Power Glamour (Mélange synthétique), CK-4 15W-40 est une huile moteur diesel haute performance conçue pour les applications intensives. Elle offre une protection et une durabilité maximales aux moteurs diesel modernes fonctionnant dans des conditions d'utilisation extrêmes. Elle assure un excellent contrôle des suies, une protection contre l'usure et une stabilité thermique optimales, tout en préservant les performances des systèmes de post-traitement des gaz d'échappement modernes.

Avantages: • Excellente protection contre l'usure et la corrosion • Contrôle supérieur des suies et des dépôts • Haute stabilité à l'oxydation • Performances fiables à haute température • Prolonge la durée de vie du moteur • Compatible avec les systèmes EGR, DPF et SCR • Réduit les dépôts sur les pistons et la formation de boues • Convient aux applications commerciales intensives

RENUOX OIL

Ultimate Quality Lubricant



Antifreeze & Coolant



ANTIFREEZE & COOLANT

ANTI BOIL & ANTI RUST



5 Kg | 4.5 Kg | **4 Kg** | 1 US Gallon | 3.5 Kg | **1 Kg**

ANTIFREEZE COOLANT

ANTI FREEZE & COOLANT

Anti-freeze, anti-boil, and anti-rust coolants are essential fluids for your vehicle's cooling system. These coolants help to protect your engine against overheating, corrosion, and damage.

Advantages:

• Anti-freeze protection: which helps to prevent the coolant from freezing in cold temperatures. This ensures that the cooling system continues to function properly even in extreme weather conditions • Anti-boil protection: The coolant contains additives that help to prevent the coolant from boiling over in hot temperatures, which can cause damage to the engine. • Anti-rust protection: The coolant contains corrosion inhibitors that help to prevent the formation of rust and other corrosion in the cooling system. This helps to extend the life of your engine and cooling system components.

Direction for use: -37°C to +129°C

Freeze Point Protection	-12	-16	-37
Parts Renuox/Parts Water	%25	%30	%50

COOLANT:

50%50 Perediluted Antifreeza & Coolant

Redy to use

ANTI FREEZE & COOLANT

Les liquides de refroidissement anti-gel, anti-ébullition et anti-rouille sont des fluides essentiels pour le système de refroidissement de votre véhicule. Ces liquides de refroidissement aident à protéger votre moteur contre la surchauffe, la corrosion et les dommages.

Avantages: • Protection anti-gel: Elle aide à empêcher le liquide de refroidissement de geler à basse température. Cela assure que le système de refroidissement continue de fonctionner correctement même dans des conditions météorologiques extrêmes • Protection anti-ébullition: Le liquide de refroidissement contient des additifs qui aident à empêcher le liquide de refroidissement de bouillir à haute température, ce qui peut causer des dommages au moteur • Protection anti-rouille: Le liquide de refroidissement contient des inhibiteurs de corrosion qui aident à prévenir la formation de rouille et d'autres corrosions dans le système de refroidissement. Cela aide à prolonger la durée de vie de votre moteur et des composants du système de refroidissement.

Mode d'emploi: -37°C to +129°C

Protection contre le point de congélation	-12	-16	-37
Pièces Renuox / Pièces d'eau	%25	%30	%50

COOLANT:

50%50 Antigel et liquide de refroidissement prédilués

Prêt à l'emploi

RENUX OIL

Ultimate Quality Lubricant

4T - JASO MA2



Motorcycle Engine Oil





Motorcycle Oil
Gasoline Engine Oil

SN 10W-30 RACE LINE

SYNTHETIC BLEND



5 Liters	4.5 Liters	4 Liters	1 US Gallon	3.5 Liters	**1 Liter**

RENUOX OIL
Ultimate Quality Lubricant

SN 10W-30
RACE LINE

API: SN SAE: 10W-30

Renuox Race Line (Synthetic Blend), is based on synthetic technology with high efficiency and is specially designed for optimal lubrication for motorcycles. Optimum performance, maximum protection of the engine under different conditions is one of the characteristics of this oil. This oil is suitable for air-cooled and water-cooled 4-stroke engines with a wet clutch or dry clutch and also for high pressure conditions and competitions.

Advantages: • Good wear protection: The oil provides good protection against engine wear, helping to extend engine life • High-temperature protection: The oil is formulated to protect against high-temperature deposits, can cause engine damage • Enhanced oxidation stability: The oil is designed to resist oxidation, which helps prevent the formation of sludge and varnish • Low-temperature performance: The oil provides good low-temperature performance, helping to improve cold starts and fuel economy • Wide temperature range: The oil is suitable for use in a wide range of temperatures, making it ideal for use in both hot and cold climates • Good engine cleanliness: The oil helps keep engines clean and prevent the formation of harmful deposits.

Properties	ASTM Test Method	10W-30
Viscosity cst 100°C	D-2270	10.8
Viscosity Index, Min	D-2299	140
Flash Point,°C	D-680	220
Pour Point,°C	D-92	-36
Density @ 15°C, kg/m³	D-1298	0.865
Total base number (mg KOH/g)	D-81	8.8

Specification Level:

API: SN JASO MA2

OEM Approvals: Honda HMEOC Yamaha Suzuki Kawasaki

API: SN SAE: 10W-30

Renuox Race Line (Mélange synthétique), est basé sur une technologie synthétique à haute efficacité et est spécialement conçu pour une lubrification optimale des motos. Des performances optimales et une protection maximale du moteur dans différentes conditions sont l'une des caractéristiques de cette huile. Cette huile convient aux moteurs à 4 temps refroidis par air et par eau avec embrayage à bain d'huile ou embrayage à sec et également pour les conditions de haute pression et les compétitions.

Avantages: • Bonne protection contre l'usure: L'huile offre une bonne protection contre l'usure du moteur, aidant à prolonger la durée de vie du moteur • Protection à haute température: L'huile est formulée pour protéger contre les dépôts à haute température, qui peuvent causer des dommages au moteur • Stabilité à l'oxydation améliorée: L'huile est conçue pour résister à l'oxydation, ce qui aide à prévenir la formation de boues et de vernis • Performance à basse température: L'huile offre une bonne performance à basse température, aidant à améliorer les démarrages à froid et l'efficacité énergétique • Large gamme de températures: L'huile est adaptée à une large gamme de températures, la rendant idéale pour une utilisation dans des climats chauds et froids • Propreté du moteur: L'huile aide à maintenir les moteurs propres et à prévenir la formation de dépôts nocifs

Motorcycle Oil
Gasoline Engine Oil

SN 10W-40 RAPID LINE

SYNTHETIC BLEND



5 Liters	4.5 Liters	4 Liters	1 US Gallon	3.5 Liters	**1 Liter**

RENUOX OIL
Ultimate Quality Lubricant

SN 10W-40

RAPID LINE

API: SN SAE: 10W-40

Renuox Rapid Line (Synthetic Blend), is based on synthetic technology and is specifically designed for optimal lubrication of motorcycles. Optimal performance and maximum engine protection under various conditions are the features of this oil and it is used for four-stroke urban and off-road motorcycles, scooters, ATVs and similar vehicles whose engines operate at high speeds and temperatures. This engine oil meets or exceeds the latest OEM (Motorcycle Manufacturer) standards.

Advantages: • Synthetic Blend Formula: Combines the benefits of synthetic and conventional base oils, providing superior protection, durability and performance, while also being resistant to oxidation, thermal degradation and sludge formation • Viscosity: It is a versatile option for different temperatures that ensures good lubrication during start-up (cold engine) and engine protection at high temperatures • Wet clutch compatibility: It ensures smooth clutch operation and prevents clutch slippage and excessive wear • Advanced performance: By reducing friction, it improves engine efficiency, leading to reduced fuel consumption.

Properties	ASTM Test Method	10W-40
Viscosity cst 100°C	D-2270	15.7
Viscosity Index, Min	D-2299	155
Flash Point,°C	D-680	220
Pour Point,°C	D-92	-33
Density @ 15°C, kg/m³	D-1298	0.870
Total base number (mg KOH/g)	D-81	10.0

Specification Level:

API: SN JASO MA2

OEM Approvals: Honda HMEOC Yamaha Suzuki Kawasaki

API: SN SAE: 10W-40

Renuox Rapid Line (Mélange synthétique) ,est basé sur une technologie synthétique et est spécialement conçu pour une lubrification optimale des motos. Des performances optimales et une protection maximale du moteur dans diverses conditions sont les caractéristiques de cette huile, et elle est utilisée pour les motos urbaines et tout-terrain à quatre temps, les scooters, les quads et des véhicules similaires dont les moteurs fonctionnent à haute vitesse et à haute température. Cette huile moteur répond ou dépasse les dernières normes des fabricants d'équipements d'origine (OEM).

Avantages: • Formule de mélange synthétique: Combine les avantages des huiles de base synthétiques et conventionnelles, offrant une protection supérieure, une durabilité et des performances élevées tout en étant résistante à l'oxydation, à la dégradation thermique et à la formation de boues • Viscosité: C'est une option polyvalente pour différentes températures qui assure une bonne lubrification lors du démarrage (moteur froid) et une protection du moteur à haute température • Compatibilité avec l'embrayage à bain d'huile: Elle assure un fonctionnement en douceur de l'embrayage et empêche le glissement de l'embrayage et l'usure excessive • Performance avancée: En réduisant les frictions, elle améliore l'efficacité du moteur, ce qui conduit à une
réduction de la consommation de carburant

Motorcycle Oil
Gasoline Engine Oil

SN 10W-50 SPEED LINE

SYNTHETIC BLEND



5 Liters | 4.5 Liters | 4 Liters | 1 US Gallon | 3.5 Liters | **1 Liter**

RENUOX OIL
Ultimate Quality Lubricant

SN 10W-50

SPEED LINE

API: SN SAE: 10W-50

Renuox Speed Line (Senthetic Blend) is a high-performance engine oil that provides excellent protection and performance for your vehicle's engine. Optimum lubrication, excellent engine cleanliness, excellent friction performance and minimum wear, gentle clutch engagement and easy gear shifting are the features of this engine oil.

Advantages: • Wide temperature range: This oil viscosity grade provides excellent protection in a wide range of temperatures, from cold starts to high-temperature operation • Synthetic blend formula: provides improved oxidation resistance, thermal stability, and wear protection compared to conventional motor oils • Enhanced protection: The oil contains advanced additives that provide enhanced protection against engine wear, sludge and deposit formation, and high-temperature oxidation. • Fuel economy benefits: The oil's synthetic blend formula and advanced additives can help improve fuel efficiency.

Properties	ASTM Test Method	10W-40
Viscosity cst 100°C	D-2270	16.3
Viscosity Index, Min	D-2299	170
Flash Point,°C	D-680	230
Pour Point,°C	D-92	-33
Density @ 15°C, kg/m³	D-1298	0.860
Total base number (mg KOH/g)	D-81	9.5

Specification Level:

API: SN JASO MA2

OEM Approvals: Honda HMEOC Yamaha Suzuki Kawasaki

API: SN SAE: 10W-50

Renuox Speed Line (Mélange Synthétique) ,est une huile moteur haute performance qui offre une protection et des performances excellentes pour le moteur de votre véhicule. Lubrification optimale, propreté exceptionnelle du moteur, performances de friction excellentes et usure minimale, engagement doux de l'embrayage et passage facile des vitesses sont les caractéristiques de cette huile moteur.


Avantages: • Large plage de températures: Cette viscosité d'huile offre une protection excellente dans une large gamme de températures, des démarrages à froid aux opérations à haute température • Formule de mélange synthétique: offre une résistance à l'oxydation améliorée, une stabilité thermique et une protection contre l'usure par rapport aux huiles moteurs conventionnelles • Protection renforcée: L'huile contient des additifs avancés qui offrent une protection renforcée contre l'usure du moteur, la formation de boues et de dépôts, et l'oxydation à haute température • Avantages en matière d'économie de carburant: La formule de mélange synthétique de l'huile et les additifs avancés peuvent aider à améliorer l'efficacité énergétique

RENUOX OIL

Ultimate Quality Lubricant

ATF

Automotive Passenger Car

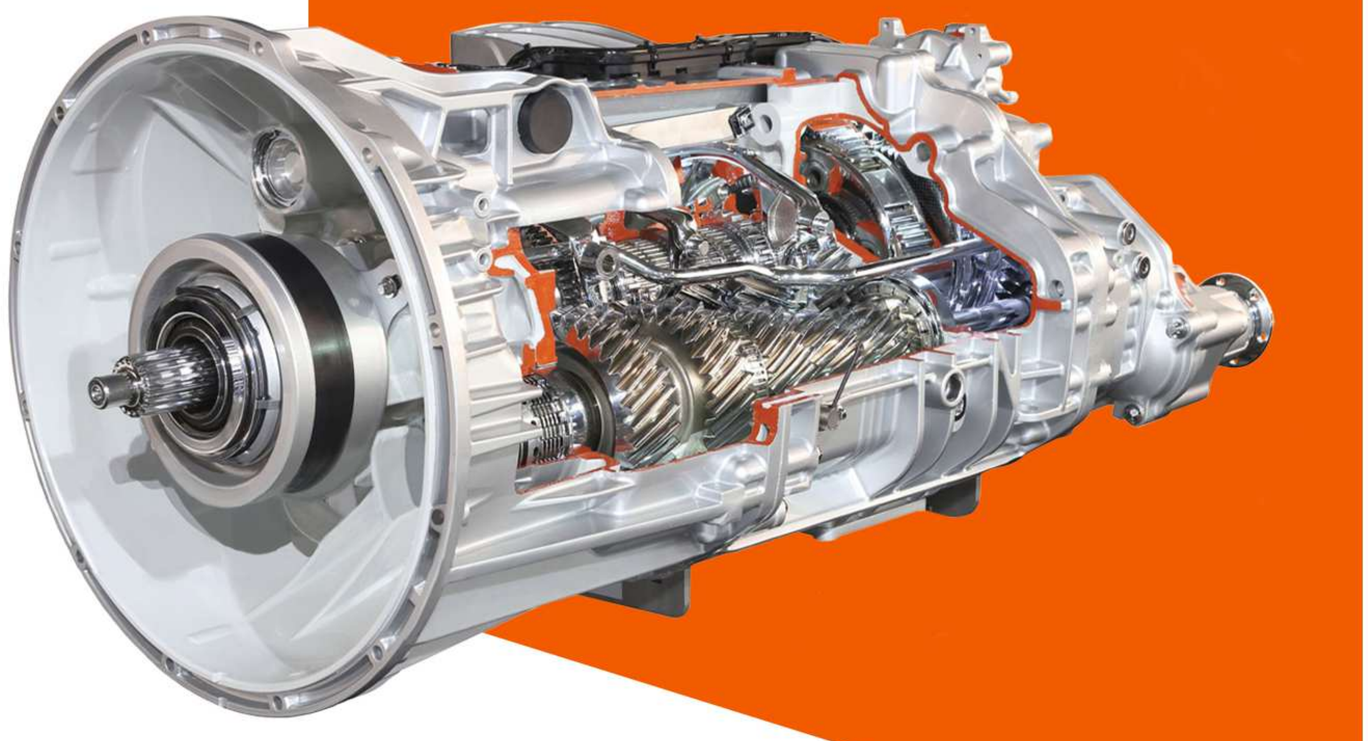

Automatic Transmission Fluid





51 | AUTOMATIC TRANSMISSION FLUID | P R N D L

AUTOMATIC TRANSMISSION FLUID

ATF AL-4 YELLOW

SYNTHETIC BLEND



5 Liters	4.5 Liters	4 Liters	1 US Gallon	3.5 Liters	1 Liter

RENUOX OIL
Ultimate Quality Lubricant

AL-4 YELLOW ATF

RENUOX ATF AL-4

Synthetic automatic transmission oil, is prepared and produced from the best synthetic base oil and internationally recognized additives with high performance and durability.

Advantages: • This product improves lubrication between parts and reduces friction for smooth gear shifting • It increases the durability of friction and protection against wear to increase the life of the gearbox • Improvement of oxidation resistance and thermal stability for longer fluid life are other special benefits of Renuox gearbox oil.

Properties	ASTM Test Method	AL-4
Viscosity cst 100°C	D-445	7.5
Viscosity Index, Min	D-2270	195
Flash Point,°C	D-92	210
Pour Point,°C	D-97	-45
Density @ 15°C, kg/m³	D-1298	0.870

Specification Level:

PSA B71 2340 Renault DP0 / AL4
Suitable for: Peugeot 206, 207, 307, 405 AL4
Recommended for use in automatic transmissions requiring Dexron IIIH / IIIG

RENUOX ATF AL4

(l'huile de transmission automatique synthétique) ,est préparée et produite à partir de la meilleure huile de base synthétique et des additifs reconnus internationalement pour leur haute performance et durabilité.

Avantages: • Ce produit améliore la lubrification entre les pièces et réduit la friction pour des changements de vitesse en douceur • Il augmente la durabilité de la friction et la protection contre l'usure pour prolonger la durée de vie de la boîte de vitesses • L'amélioration de la résistance à l'oxydation et de la stabilité thermique pour une durée de vie plus longue du fluide sont d'autres avantages spéciaux de l'huile de boîte de vitesses Renuox.

AUTOMATIC TRANSMISSION FLUID

ATF DEXRON III

SYNTHETIC BLEND



5 Liters | 4.5 Liters | 4 Liters | 1 US Gallon | 3.5 Liters | **1 Liter**

RENUOX OIL
Ultimate Quality Lubricant

DEXRON III
ATF

RENUOX ATF DEXRON-III
Synthetic Blend, is a synthetic lubricant based on the best high-quality base oil, which is designed according to the requirements of General Motors. provides superior protection and performance for a wide range of automatic transmissions, helping to extend transmission life and improve shift quality.
Advantages: • Enhanced protection against wear, rust, and corrosion for longer transmission life • Excellent low-temperature performance for smooth shifting in cold weather • Improved oxidation resistance for extended fluid life • Superior thermal stability to resist breakdown in high-temperature conditions • Creating a protective layer on gearbox parts.

Properties	ASTM Test Method	Dexron III
Viscosity cst 100°C	D-445	7.5
Viscosity Index, Min	D-2270	200
Flash Point,°C	D-92	220
Pour Point,°C	D-97	-45
Density @ 15°C, kg/m³	D-1298	0.875

Specification Level:

GM Dexron® III (F / G / H) Caterpillar T0-2 Ford Mercon® (M2C138CJ / M2C166-H)
Allison C-4 ZF TE-ML 04D, 14A MAN 339 Type V1 / Z1 Voith H55 . 6335
MB 236.5 / 236.6 / 236.7 Volvo 97341

RENUOX ATF DEXRON-III
(le mélange synthétique), est un lubrifiant synthétique basé sur la meilleure huile de base de haute qualité, conçu selon les exigences de General Motors. Il offre une protection et des performances supérieures pour une large gamme de transmissions automatiques, aidant à prolonger la durée de vie de la transmission et à améliorer la qualité des changements de vitesse.
Avantages: • Protection renforcée contre l'usure, la rouille et la corrosion pour une durée de vie plus longue de la transmission • Excellente performance à basse température pour des changements de vitesse en douceur par temps froid • Amélioration de la résistance à l'oxydation pour une durée de vie prolongée du fluide • Stabilité thermique supérieure pour résister à la dégradation dans des conditions de haute température • Création d'une couche protectrice sur les pièces de la boîte de vitesses.

AUTOMATIC TRANSMISSION FLUID

ATF DEXRON VI

SYNTHETIC BLEND



5 Liters | 4.5 Liters | 4 Liters | 1 US Gallon | 3.5 Liters | **1 Liter**

RENUOX OIL
Ultimate Quality Lubricant

DEXRON VI ATF

RENUOX ATF DEXRON-VI

Synthetic Blend, is a combination of synthetic base oil and high quality additives designed to meet the needs of modern automatic transmissions.

Advantages: • Enhanced protection against wear, rust, and corrosion for longer transmission life • Excellent low-temperature performance for smooth shifting in cold weather • Improved oxidation resistance for extended fluid life • Superior thermal stability to resist breakdown in high-temperature conditions • Compatibility with most transmissions, including those that require DEXRON-VI fluid.

Properties	ASTM Test Method	Dexron VI
Viscosity cst 100°C	D-445	6.3
Viscosity Index, Min	D-2270	200
Flash Point,°C	D-92	215
Pour Point,°C	D-97	-48
Density @ 15°C, kg/m³	D-1298	0.860

Specification Level:

GM Dexron® VI Backward compatible with: Dexron® III (H), Dexron® II Ford MERCON® LV Allison C-4 Voith H55.6336.XX ZF TE-ML 09,11 MB 236.41 Suitable for use in GM 6-speed and later automatic transmissions (2006 onwards)

RENUOX ATF DEXRON-VI

(Mélange Synthétique),est une combinaison d'huile de base synthétique et d'additifs de haute qualité, conçue pour répondre aux besoins des transmissions automatiques modernes.

Avantages: • Protection renforcée contre l'usure, la rouille et la corrosion pour une durée de vie plus longue de la transmission • Excellente performance à basse température pour des changements de vitesse en douceur par temps froid • Amélioration de la résistance à l'oxydation pour une durée de vie prolongée du fluide • Stabilité thermique supérieure pour résister à la dégradation dans des conditions de haute température • Compatibilité avec la plupart des transmissions, y compris celles nécessitant du fluide DEXRON-VI.

AUTOMATIC TRANSMISSION FLUID

ATF SP-IV
SYNTHETIC BLEND



5 Liters | 4.5 Liters | 4 Liters | 1 US Gallon | 3.5 Liters | **1 Liter**

RENUOX OIL
Ultimate Quality Lubricant

SP-IV
ATF

RENUOX ATF SP-IV
Synthetic Blend, Designed and produced for six-speed gearboxes.
Advantages: • Helps maintain smooth gearing and proper transmission operation • Provides protection against corrosion and deposits • It is suitable for use in a wide range of Hyundai and Kia models • Friction stability and protection against wear to increase the life of the gearbox in Hyundai and Kia cars and improving oxidation resistance and thermal stability for longer fluid life are special advantages of Renuox gearbox oil.

Properties	ASTM Test Method	SP-IV
Viscosity cst 100°C	D-445	6.2
Viscosity Index, Min	D-2270	200
Flash Point,°C	D-92	220
Pour Point,°C	D-97	-48
Density @ 15°C, kg/m³	D-1298	0.860

Specification Level:

Hyundai / Kia SP-IV (OEM Spec)
Hyundai / Kia / Genesis 6-speed & 8-speed ATF
Recommended for use in: Hyundai A6LF1 / A6MF1 / A8LF2 / A8TR1 - Kia 6AT & 8AT Transmissions (post - 2010 models)

RENUOX ATF SP-IV
(Le mélange synthétique), conçu et produit pour les boîtes de vitesses à six rapports.
Avantages: • Aide à maintenir des changements de vitesse en douceur et un bon fonctionnement de la transmission • Offre une protection contre la corrosion et les dépôts • Convient à une large gamme de modèles Hyundai et Kia • La stabilité de la friction et la protection contre l'usure pour augmenter la durée de vie de la boîte de vitesses dans les voitures Hyundai et Kia, ainsi que l'amélioration de la résistance à l'oxydation et de la stabilité thermique pour une durée de vie plus longue du fluide, sont des avantages spécifiques de l'huile de boîte de vitesses Renuox.

AUTOMATIC TRANSMISSION FLUID

ATF WS

SYNTHETIC BLEND



5 Liters | 4.5 Liters | 4 Liters | 1 US Gallon | 3.5 Liters | **1 Liter**

RENUOX OIL
Ultimate Quality Lubricant

WS
ATF

RENUOX ATF WS

Synthetic Blend, It is designed for six-speed gearboxes. This product is recommended for all types of Toyota and Lexus vehicles with ATF WS specifications.

Advantages: • Helps maintain smooth gearing and proper transmission performance • Provides protection against corrosion and deposits • It provides excellent protection and performance, helping to extend transmission life and improve shift quality • Friction stability and protection against wear to increase the life of the gearbox in Toyota and Lexus cars and improving oxidation resistance and thermal stability for longer fluid life are special advantages of Renuox gearbox oil.

Properties	ASTM Test Method	WS
Viscosity cst 100°C	D-445	6.0
Viscosity Index, Min	D-2270	200
Flash Point,°C	D-92	220
Pour Point,°C	D-97	-50
Density @ 15°C, kg/m³	D-1298	0.860

Specification Level:

Toyota ATF WS (World Standard) OEM Specification Toyota/Lexus/Scion automatic transmissions (2004 - present) Meets Toyota WS standard under Toyota spec No.JWS 3324
Not backward compatible with Toyota T-I V, D-II, or Dexron ATFs
Suitable for use in Aisin-Warner 6/8/10-speed AT (e.g., U660E U760E, UB80E) Fully Synthetic - Low Viscosity - Long Life Formula

RENUOX ATF WS (Mélange Synthétique), conçu pour les boîtes de vitesses à six rapports. Ce produit est recommandé pour tous les types de véhicules Toyota et Lexus avec les spécifications ATF WS.

Avantages: • Aide à maintenir un passage des vitesses en douceur et une performance de transmission appropriée • Offre une protection contre la corrosion et les dépôts • Fournit une excellente protection et performance, aidant à prolonger la durée de vie de la transmission et à améliorer la qualité des changements de vitesse • Stabilité de friction et protection contre l'usure pour augmenter la durée de vie de la boîte de vitesses des voitures Toyota et Lexus, et amélioration de la résistance à l'oxydation et de la stabilité thermique pour une durée de vie plus longue du fluide sont des avantages particuliers de l'huile de boîte de vitesses Renuox.

AUTOMATIC TRANSMISSION FLUID

P R N D L

ATF DCT YELLOW

SYNTHETIC BLEND



5 Liters | 4.5 Liters | 4 Liters | 1 US Gallon | 3.5 Liters | **1 Liter**

RENUOX OIL
Ultimate Quality Lubricant

DCT YELLOW ATF

ATF DCT YELLOW

It is designed and produced with synthetic technology for double clutch transmissions. It provides protection and excellent performance and helps to increase the life of the transmission and improve the quality of gear shifting in DCT equipped cars.

Advantages: • Provides protection against corrosion and deposits • This oil is recommended for use in all gearboxes with dual clutch system with ATF DCT quality level • The stability of friction and protection against wear to increase the life of the gearbox in cars equipped with DCT and to improve oxidation resistance and thermal stability for longer life of the fluid are among the prominent features of this product.

Properties	ASTM Test Method	DCT
Viscosity cst 100°C	D-445	7.5
Viscosity Index, Min	D-2270	180
Flash Point,°C	D-92	230
Pour Point,°C	D-97	-50
Density @ 15°C, kg/m³	D-1298	0.870

Specification Level:

VW / Audi G 052 182 / G 052 529 BMW DCTF-1 / MTF LT-S Ford WSS-M2C936-A (Powershift)
MB 236.21 (7G-DCT) Mitsubishi DiaQueen SSTF-1 Hyundai / Kia SP-IV M (DCT TYPE)
Porcshe PDK (for wet clutch system) Volvo DCT Renault DC4
Suitable for use in Getrag, BorgWarner, ZF wet DCTs

ATF DCT YELLOW

(Transmission à Double Embrayage) RENUOX ATF DCT YELLOW, conçu et produit avec une technologie synthétique pour les transmissions à double embrayage. Il offre une protection et des performances excellentes et aide à augmenter la durée de vie de la transmission et à améliorer la qualité du changement de vitesse dans les voitures équipées de DCT.

Avantages: • Offre une protection contre la corrosion et les dépôts • Cette huile est recommandée pour une utilisation dans toutes les boîtes de vitesses avec un système à double embrayage avec un niveau de qualité ATF DCT • La stabilité de la friction et la protection contre l'usure pour augmenter la durée de vie de la boîte de vitesses dans les voitures équipées de DCT et l'amélioration de la résistance à l'oxydation et de la stabilité thermique pour une durée de vie plus longue du fluide sont parmi les caractéristiques remarquables de ce produit.

AUTOMATIC TRANSMISSION FLUID

ATF CVT RED SYNTHETIC BLEND



5 Liters | 4.5 Liters | 4 Liters | 1 US Gallon | 3.5 Liters | **1 Liter**

RENUOX OIL
Ultimate Quality Lubricant

CVT RED ATF

RENUOX ATF CVT Red

It is prepared and produced from high quality synthetic oil and special additive for CVT gearboxes and is suitable for modern gearboxes with high performance.

Advantages: • Provides excellent protection and performance for CVTs, helping to extend transmission life and improve shift quality in a wide range of vehicles • Provides protection against rust, corrosion and wear • Other prominent features of Renuox gearbox oil are increased friction durability and protection against wear to increase the lifespan of the gearbox, improved lubrication at low temperatures for better performance in cold weather and improved oxidation resistance for longer fluid life.

Properties	ASTM Test Method	CVT
Viscosity cst 100°C	D-445	7.5
Viscosity Index, Min	D-2270	190
Flash Point,°C	D-92	220
Pour Point,°C	D-97	-50
Density @ 15°C, kg/m³	D-1298	0.870

Specification Level:

Nissan NS-2 / NS-3 Toyota CVT TC / CVT FE Honda HMMF / HCF-2 Mitsubishi CVTF-J1 / CVTF-J4
Subaru i-CVT / Lineartronic CVTF Suzuki CVTF Green 1 / CVT Fluid 3320 MazdaCVTF 3320
Daihatsu Amix CVTF-DC hyundai / Kia SP-CVT1 BMW CVT EZL 799 / Mini CVT
Audi / VW TL 52180 / G 052 516
Suitable for use in JATCO and Aisin CVT units (belt and chain type)

ATF CVT RED

RENUOX ATF CVT RED ,préparé et produit à partir d'huile synthétique de haute qualité et d'additifs spéciaux pour les boîtes de vitesses CVT, convient aux boîtes de vitesses modernes à haute performance.

Avantages: • Offre une excellente protection et performance pour les CVT, aidant à prolonger la durée de vie de la transmission et à améliorer la qualité des changements de vitesse dans une large gamme de véhicules • Offre une protection contre la rouille, la corrosion et l'usure • Parmi les autres caractéristiques remarquables de l'huile de boîte de vitesses Renuox, on trouve une durabilité accrue de la friction et une protection contre l'usure pour augmenter la durée de vie de la boîte de vitesses, une lubrification améliorée à basse température pour de meilleures performances par temps froid, et une meilleure résistance à l'oxydation pour une durée de vie plus longue du fluide.

AUTOMATIC TRANSMISSION FLUID

ATF CVT YELLOW
SYNTHETIC BLEND



5 Liters | 4.5 Liters | 4 Liters | 1 US Gallon | 3.5 Liters | **1 Liter**

RENUOX OIL
Ultimate Quality Lubricant

CVT YELLOW ATF

ATF CVT Yellow

RENUOX ATF CVT Yellow It is prepared and produced from high quality synthetic oil and special additive for CVT gearboxes and is suitable for modern gearboxes with high performance.

Advantages: • Provides protection against corrosion and deposits • Provides excellent protection and performance, helping to extend CVT life and improve shift quality in CVT-equipped vehicles • Friction stability and protection against wear to increase the life of CVT and improve oxidation resistance and thermal stability for longer fluid life are special advantages of this product.

Properties	ASTM Test Method	CVT
Viscosity cst 100°C	D-445	7.5
Viscosity Index, Min	D-2270	190
Flash Point,°C	D-92	220
Pour Point,°C	D-97	-50
Density @ 15°C, kg/m³	D-1298	0.870

Specification Level:

Nissan NS-2 / NS-3 Toyota CVT TC / CVT FE Honda HMMF / HCF-2 Mitsubishi CVTF-J1 / CVTF-J4 Subaru i-CVT / Lineartronic CVTF Suzuki CVTF Green 1 / CVT Fluid 3320 MazdaCVTF 3320 Daihatsu Amix CVTF-DC hyundai / Kia SP-CVT1 BMW CVT EZL 799 / Mini CVT Audi / VW TL 52180 / G 052 516
Suitable for use in JATCO and Aisin CVT units (belt and chain type)

ATF CVT YELLOW

RENUOX ATF CVT YELLOW , préparé et produit à partir d'huile synthétique de haute qualité et d'additifs spéciaux pour les boîtes de vitesses CVT, convient aux boîtes de vitesses modernes à haute performance.

Avantages: • Offre une protection contre la corrosion et les dépôts • Fournit une excellente protection et performance, aidant à prolonger la durée de vie des CVT et à améliorer la qualité des changements de vitesse dans les véhicules équipés de CVT • La stabilité de la friction et la protection contre l'usure pour augmenter la durée de vie des CVT et améliorer la résistance à l'oxydation et la stabilité thermique pour une durée de vie plus longue du fluide sont des avantages particuliers de ce produit.

RENUOX OIL

Ultimate Quality Lubricant

Automotive



Manual

Gear Box

Oil



Passenger Car
GEARBOX Oil

GEAR OIL

GL-5 75W-80
SYNTHETIC BLEND



5 Liters | 4.5 Liters | 4 Liters | 1 US Gallon | 3.5 Liters | **1 Liter**

RENUOX OIL
Ultimate Quality Lubricant



GL-5 EP
75W-80

RENUOX GEAR OIL EP GL5 75W-80
is a high performance lubricant designed for use in manual transmissions and differentials. This oil is prepared and produced with a special formulation and using the combination of the first and synthetic base oil and the best additives.
Advantages: • This product effectively combats lot load, high pressure and high temperature • This oil reduces heat and noise in manual transmissions • It is suitable for use in manual gearboxes, differentials and hypoid gearboxes, and increases smoothness in torque • Renuox gear oil has a high resistance to wear and corrosion and increases the life of the car gearbox.

Properties	ASTM Test Method	75W-80
Viscosity cst 100°C	D-445	11.5
Viscosity Index, Min	D-2270	165
Flash Point,°C	D-92	220
Pour Point,°C	D-97	-48
Density @ 15°C, kg/m³	D-1298	880
Sulfur - Phosphorus Additive System		Yes (EP additives)

Specification Level:

API: GL-5 MIL-PRF-2105E SAE J2360 MAN 342 Typ M1/M2/M3 Scania STO 1:0
Volvo 97312 / 97305 MB-Approval 235.8 ZF TE-ML 07A/08/16B/17B/19B/21A
Mack GO-J Plus DAF / Renault / Iveco Extended Drain Requirements
Suitable for use in synchronized and non-synchronized manual gearboxes and axles requiring GL-5 protection

GEAR OIL EP API: GL-5 SAE: 75W-80
Renuox Gear Oil L'Huile de boîte ,est un lubrifiant haute performance conçu pour une utilisation dans les transmissions manuelles et les différentiels. Cette huile est préparée et produite avec une formulation spéciale en utilisant la combinaison de la première huile de base et de l'huile synthétique ainsi que les meilleurs additifs.
Avantages: • Ce produit combat efficacement les charges lourdes, les hautes pressions et les hautes températures • Cette huile réduit la chaleur et le bruit dans les transmissions manuelles • Elle est adaptée à une utilisation dans les boîtes de vitesses manuelles, les différentiels et les boîtes de vitesses hypoïdes, et augmente la douceur du couple • L'huile de boîte Renuox a une haute résistance à l'usure et à la corrosion et augmente la durée de vie de la boîte de vitesses de la voiture

Passenger Car
GEARBOX Oil

GEAR OIL

GL-5 85W-90

SYNTHETIC BLEND



5 Liters | 4.5 Liters | 4 Liters | 1 US Gallon | 3.5 Liters | **1 Liter**

RENUOX OIL
Ultimate Quality Lubricant



GL-5 EP

85W-90

RENUOX GEAR OIL EP GL5 85W-90
is a protective lubricant designed for use in gearboxes, differential and hypoid gearboxes that works effectively.
Advantages: • This oil has many anti-wear additives that give the gear box resistance to wear, corrosion and long life • It is suitable for use in gearboxes, differential system and hypoid gearboxes • Increases smoothness in torque and hydraulic cylinders • The advantages of this gear oil include very smooth and vibration-free gear shifting, long oil life and thermal stability, anti-oxidation and reduction of friction, and reduction of heat and noise in the gearbox.

Properties	ASTM Test Method	85W-90
Viscosity cst 100°C	D-445	18.5
Viscosity Index, Min	D-2270	105
Flash Point,°C	D-92	220
Pour Point,°C	D-97	-18
Density @ 15°C, kg/m³	D-1298	910
Sulfur - Phosphorus Additive System		Yes (EP additives)

Specification Level:

API: GL-5 MIL-L-2105D SAE J2360 ZF TE-ML: 05A / 07A / 12E / 16B / 17B / 19B / 21A MAN 342 Typ M1 MB235.0

This oil is Formulated for use in hypoid gear systems operating under high load and shock conditions, such as differentials and rear axles. it is not recommended for synchronized manual transmissions that require API GL-4, as the high level of EP (Extreme Pressure) additives may cause corrosion in yellow metals like brass or bronze components.

Cette huile est formulée pour être utilisée dans les systèmes d'engrenages hypoïdes fonctionnant dans des conditions de charge et de choc élevées, tels que les différentiels et les essieux arrière. Elle n'est pas recommandée pour les transmissions manuelles synchronisées qui nécessitent API GL-4, car le niveau élevé d'additifs EP (extrême pression) peut provoquer de la corrosion dans les métaux jaunes comme les composants en laiton ou en bronze.

API: GL-5 SAE: 85W-90
Renuox Gear Oil L'Huile de boîte est un lubrifiant protecteur conçu pour une utilisation dans les boîtes de vitesses, les différentiels et les boîtes de vitesses hypoïdes, qui fonctionne efficacement.
Avantages: • Cette huile contient de nombreux additifs anti-usure qui confèrent à la boîte de vitesses une résistance à l'usure, à la corrosion et une longue durée de vie • Elle est adaptée à une utilisation dans les boîtes de vitesses, les systèmes différentiels et les boîtes de vitesses hypoïdes • Augmente la fluidité du couple et des cylindres hydrauliques • Les avantages de cette huile de boîte de vitesses incluent des changements de vitesse très fluides et sans vibrations, une longue durée de vie de l'huile et une stabilité thermique, une résistance à l'oxydation et une réduction de la friction, ainsi qu'une réduction de la chaleur et du bruit dans la boîte de vitesses

Passenger Car
GEARBOX Oil

GEAR OIL

GL-4 75W-80

SYNTHETIC BLEND



5 Liters | 4.5 Liters | 4 Liters | 1 US Gallon | 3.5 Liters | **1 Liter**

RENUOX OIL
Ultimate Quality Lubricant

GL-4 EP
75W-80

Renuox Gear Oil EP GL4 75W-80
is a protective lubricant designed for use in differential systems for certain vehicles. It has a synthetic formula with anti-wear additives, resistance to wear, corrosion and useful life.
Advantages: • It is suitable for use in cars with special differential and gearbox systems • Reducing wear and increasing the useful life of the differential system is one of the prominent features of this engine oil • One of the advantages of Renuox engine oil is improved performance at very high and low temperatures • Tolerating very high loads is against increasing pressure and improving hydraulic performance and reducing foam and incompatibility.

Properties	ASTM Test Method	75W-80
Viscosity cst 100°C	D-445	9.5
Viscosity Index, Min	D-2270	180
Flash Point,°C	D-92	200
Pour Point,°C	D-97	-40
Density @ 15°C, kg/m³	D-1298	880
Sulfur - Phosphorus Additive System		Yes (EP additives)

Specification Level:

API: GL-4 SAE J2360 (for GL-4 class) MIL-L-2105 ZF TE-ML 02D / 16K / 17A MAN 341 Typ E1 / Z2 MB 235.4 Volvo 97305 Renault Trucks (RVI) gearboxes requiring GL-4 Scania ST0 1 : 1 G Suitable for use in synchronized manual transmissions and transaxles where a low-viscosity GL-4 oil is recommended

GEAR OIL EP API: GL-4 SAE: 75W-80
RENUOX GEAR OIL EP L'Huile de boîte, est un lubrifiant protecteur conçu pour être utilisé dans les systèmes différentiels de certains véhicules. Elle a une formule synthétique avec des additifs anti-usure, une résistance à l'usure, à la corrosion et une longue durée de vie.
Avantages: • Elle convient aux voitures avec des systèmes différentiels et de boîte de vitesses spéciales • La réduction de l'usure et l'augmentation de la durée de vie utile du système différentiel est l'une des caractéristiques les plus importantes de cette huile moteur • L'un des avantages de l'huile moteur Renuox est d'améliorer les performances à des températures très élevées et très basses • La tolérance à des charges très élevées s'oppose à l'augmentation de la pression et améliore les performances hydrauliques tout en réduisant la mousse et l'incompatibilité

Passenger Car
GEARBOX Oil

GEAR OIL

GL-4 85W-90

HIGH QUALITY PRODUCT



5 Liters | 4.5 Liters | 4 Liters | 1 US Gallon | 3.5 Liters | **1 Liter**

RENUOX OIL
Ultimate Quality Lubricant



GL-4 EP

85W-90

Renuox Gear Oil Ep GL4 85W-90
is a high performance lubricant designed for use in manual transmissions and differential systems of vehicles. This oil has many anti-wear additives that give the gearbox resistance to wear, corrosion and long life.
Advantage: • It has a reduction in heat and noise in manual gearboxes • It is suitable for use in manual gearboxes and differential systems • Increases smoothness in torque and hydraulic cylinders • Reducing wear and increasing the useful life of the differential system and improving hydraulic performance and reducing foaming and incompatibility are special advantages of Rinox gear oil.

Properties	ASTM Test Method	85W-90
Viscosity cst 100°C	D-445	17.0
Viscosity Index, Min	D-2270	110
Flash Point,°C	D-92	210
Pour Point,°C	D-97	20-
Density @ 15°C, kg/m³	D-1298	900
Sulfur - Phosphorus Additive System		Yes (EP additives)

Specification Level:


API: GL-4 SAE J2360 MIL-L-2105 ZF TE-ML 02B / 05A / 07A / 08 MAN 341 Typ E2 MB 235.1 Volvo 97310 Renault / Mack manual gearboxes requiring GL-4 Suitable for use in synchronized transmissions, manual gearboxes, and axles where GL-4 is recommended

API: GL-4 SAE: 85W-90
RENUOX GEAR OIL EP L'Huile de boîte ,est un lubrifiant haute performance conçu pour être utilisé dans les transmissions manuelles et les systèmes différentiels des véhicules. Cette huile contient de nombreux additifs anti-usure qui confèrent à la boîte de vitesses une résistance à l'usure, à la corrosion et une longue durée de vie.
Avantages: • Elle réduit la chaleur et le bruit dans les boîtes de vitesses manuelles • Elle convient pour une utilisation dans les boîtes de vitesses manuelles et les systèmes différentiels • Elle augmente la fluidité dans le couple et les cylindres hydrauliques • La réduction de l'usure et l'augmentation de la durée de vie utile du système différentiel, ainsi que l'amélioration des performances hydrauliques et la réduction de la formation de mousse et de l'incompatibilité, sont des avantages particuliers de l'huile pour engrenages Renuox

RENUOX OIL

Ultimate Quality Lubricant

Automotive
Heavy Duty

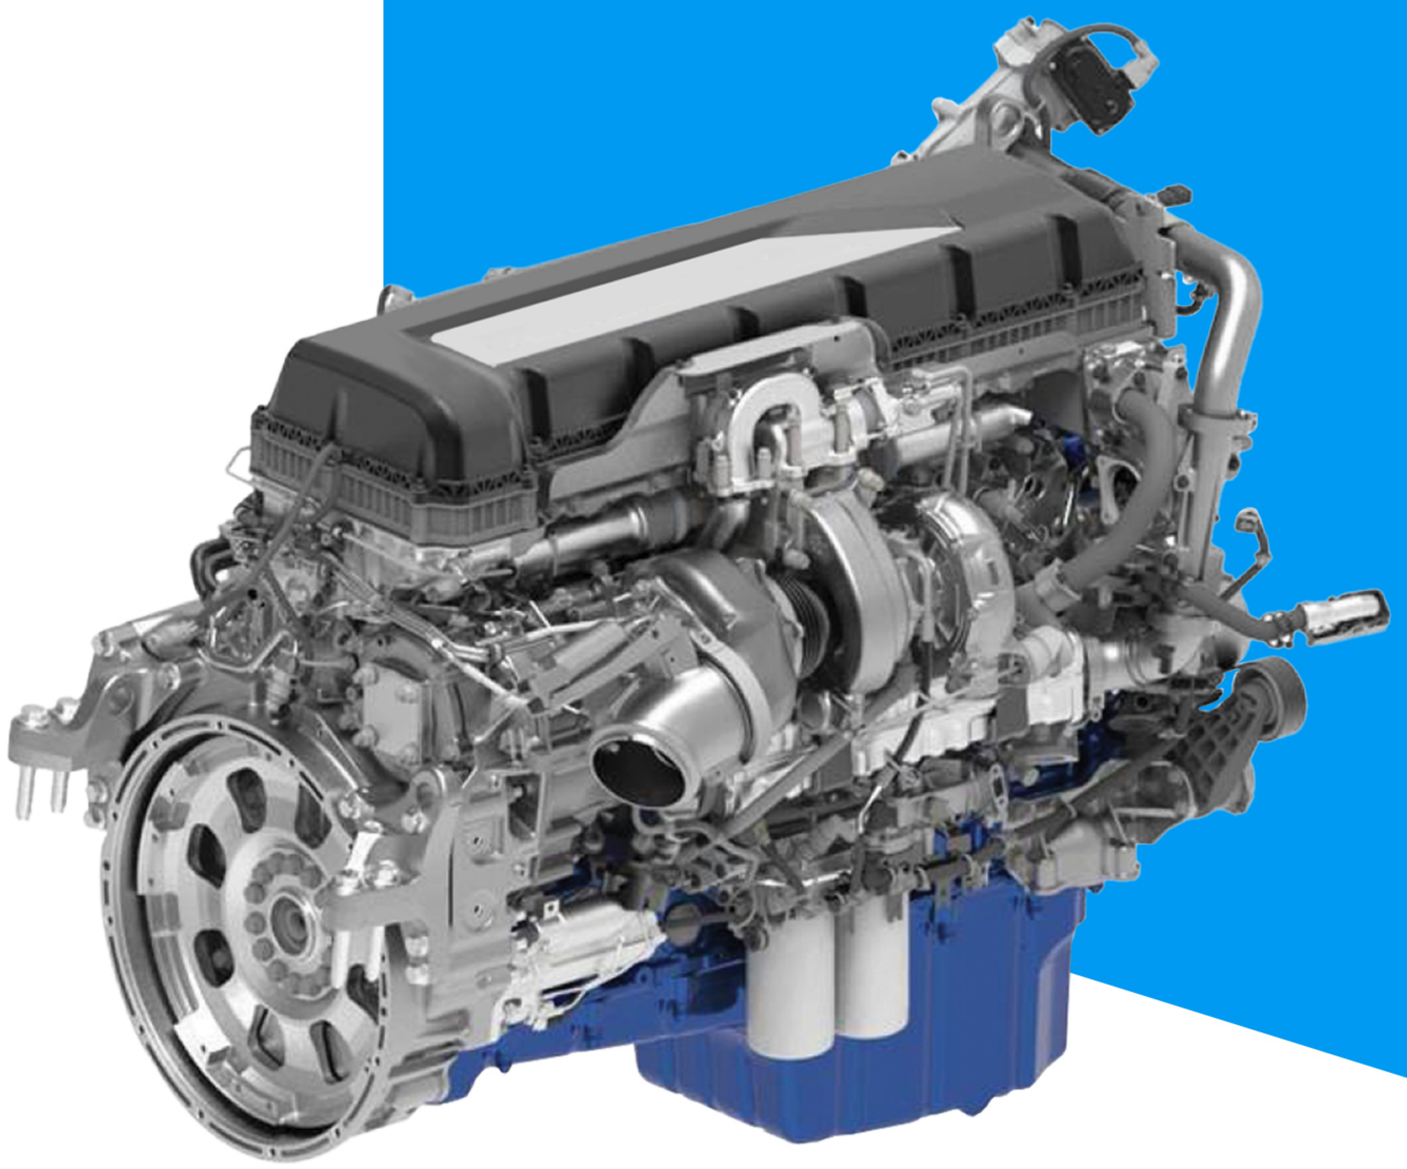

Diesel Engine Oil



77 | Automotive Heavy Duty Diesel Engine Oil

Automotive
Heavy Duty
Diesel Engine Oil

CK-4 10W-40

MAGIC POWER EURO 6 PLUS

SYNTHETIC BLEND



208 Liters | **20 Liters**

RENUOX OIL
Ultimate Quality Lubricant



CK-4 10W-40

MAGIC POWER EURO 6 PLUS

API: CK-4 SAE: 10W-40

Renuox Magic Power Euro 6 Plus, This product of synthetic base oil and the best special additives is suitable for diesel cars with Euro 6 standards and cars manufactured from 2017 onwards. CK-4 15W-40 diesel engine oil is recommended for use in diesel engines that require API CK-4, CJ-4, CI-4 , CH-4 specifications and for diesel vehicles and equipment that require exceptional performance, protection And fuel efficiency is ideal.

Advantages: • Excellent engine protection • Improved fuel consumption • Longer oil drain intervals • Excellent wear protection • Resistant to oil oxidation and decomposition Increased shear stability • Improved engine performance for cold start.

Properties	ASTM Test Method	10W-40
Viscosity cst 100°C	D-445	14.8
Viscosity Index, Min	D-2270	150
Flash Point,°C	D-92	228
Pour Point,°C	D-97	-36
Density @ 15°C, kg/m³	D-1298	880
Total base number (mg KOH/g)	D-2896	10.2

Specification Level:

API CK-4, CJ-4, CI-4 Plus, CI-4 ACEA E9 / E7 Cummins CES 20086 Volvo VDS-4.5 Mack E0S-4.5 MB 228.31 CAT ECF-3 MAN M3575 Renault RLD-4 Detroit Diesel DFS 93K222 Suitable for Euro IV/V/VI and EPA 2007/2010 engines with DPF, EGR, and SCR systems

API: CK-4 SAE: 10W-40

Renuox Magic Power Euro 6 Plus, est un produit à base d'huile synthétique avec les meilleurs additifs spéciaux, convenant aux voitures diesel avec les normes Euro 6 et aux voitures fabriquées à partir de 2017. L'huile moteur diesel CK-4 15W-40 est recommandée pour une utilisation dans les moteurs diesel qui nécessitent les spécifications API CK-4, CJ-4, CI-4, CH-4 et pour les véhicules et équipements diesel qui nécessitent des performances exceptionnelles, une protection et une efficacité énergétique optimales.

Avantages: • Excellente protection du moteur • Amélioration de la consommation de carburant • Intervalles de vidange d'huile plus longs • Protection contre l'usure excellente • Résistance à l'oxydation et à la décomposition de l'huile • Augmentation de la stabilité au cisaillement • Amélioration des performances du moteur au démarrage à froid.

Automotive
Heavy Duty
Diesel Engine Oil

CK-4 15W-40

POWER GLAMOUR EURO 6 PLUS

SYNTHETIC BLEND



208 Liters | **20 Liters**

RENUOX OIL
Ultimate Quality Lubricant



CK-4 15W-40

POWER GLAMOUR EURO 6 PLUS

API : CK-4 SAE : 15W-40

Renuox Power Glamour Euro 6 Plus, is a high performance diesel engine oil designed to provide excellent protection and performance for modern diesel engines. This product of synthetic base oil and the best special additives is suitable for diesel cars with Euro 6 standards and cars manufactured from 2017 onwards. CK-4 15W-40 diesel engine oil is recommended for use in diesel engines that require API CK-4, CJ-4, CI-4 specifications and for diesel vehicles and equipment that require exceptional performance, protection And fuel efficiency is ideal.

Advantages: • Advanced engine protection • Improved fuel consumption • Reducing greenhouse gas emissions • Longer oil drain intervals • Excellent wear protection • Resistant to oil oxidation and decomposition • Suitable for on-road and off-road diesel engines • Improved cold start performance • Improved viscosity control

Properties	ASTM Test Method	15W-40
Viscosity cst 100°C	D-445	14.5
Viscosity Index, Min	D-2270	135
Flash Point,°C	D-92	230
Pour Point,°C	D-97	-30
Density @ 15°C, kg/m³	D-1298	885
Total base number (mg KOH/g)	D-2896	10.0

Specification Level:

API CK-4, CJ-4, CI-4 Plus, CI-4 ACEA E9 / E7 Cummins CES 20086 Volvo VDS-4.5 Mack E0S-4.5 MB 228.31 CAT ECF-3 MAN M3575 Renault RLD-4 Detroit Diesel DFS 93K222 Suitable for Euro IV/V/VI and EPA 2007/2010 engines with DPF, EGR, and SCR systems

API : CK-4 SAE : 15W-40

Renuox Power Glamour Euro 6 Plus ,est une haute performance conçue pour offrir une protection et des performances excellentes aux moteurs diesel modernes. Ce produit à base d'huile synthétique avec les meilleurs additifs spéciaux convient aux voitures diesel avec les normes Euro 6 et aux voitures fabriquées à partir de 2017. L'huile moteur diesel CK-4 15W-40 est recommandée pour une utilisation dans les moteurs diesel nécessitant les spécifications API CK-4, CJ-4, CI-4 et pour les véhicules et équipements diesel nécessitant des performances exceptionnelles, une protection et une efficacité énergétique optimales.

Avantages: • Protection avancée du moteur • Amélioration de la consommation de carburant • Réduction des émissions de gaz à effet de serre • Intervalles de vidange d'huile plus longs • Excellente protection contre l'usure • Résistant à l'oxydation et à la décomposition de l'huile • Convient aux moteurs diesel routiers et tout-terrain • Amélioration des performances de démarrage à froid • Meilleur contrôle de la viscosité

Automotive
Heavy Duty
Diesel Engine Oil

CJ-4 10W-40

EXTRA POWER EURO 5 PLUS

SYNTHETIC BLEND



208 Liters | **20 Liters**

RENUOX OIL
Ultimate Quality Lubricant



CJ-4 10W-40

EXTRA POWER EURO 5 PLUS

API : CJ-4 SAE : 10W-40

Renuox Extra Power Euro 5 Plus, It has been prepared and produced using quality synthetic oil for protection and superior performance in a wide range of vehicles and diesel equipment.

Advantages: • is a high-performance diesel engine oil designed to meet the lubrication requirements of modern, high-output, low-emission diesel engines. • Provides excellent protection against wear, corrosion, and deposits. • This product has increased soot spreading capability and is suitable for modern diesel engines equipped with exhaust gas recirculation (EGR) and diesel particle filters (DPF) to protect against wear caused by soot. • Improving oxidation resistance and thermal stability for longer oil life is another feature of Renuox engine oil. • This product has an excellent viscosity index to protect the engine during cold start as well as good performance at high temperature.

Properties	ASTM Test Method	10W-40
Viscosity cst 100°C	D-445	14.6
Viscosity Index, Min	D-2270	150
Flash Point,°C	D-92	226
Pour Point,°C	D-97	-36
Density @ 15°C, kg/m³	D-1298	880
Total base number (mg KOH/g)	D-2896	10.2

Specification Level:

API CJ-4, CI-4 Plus, CI-4, CH-4 ACEA E7 Cummins CES 20081 Volvo VDS-4
Mack E0-0 Premium Plus MB 228.31 MAN M3275 Renault RLD-3
Detroit Diesel DFS 93K218 Deutz DQC III-10 LA Suitable for high speed four-stroke diesel engines with EGR and some with DPF

API : CJ-4 SAE : 10W-40

Renuox Extra Power Euro 5 Plus ,est préparée ,et produite à partir d'huile synthétique de qualité pour une protection et des performances supérieures dans un large éventail de véhicules et d'équipements diesel.

Avantages: • Conçue pour répondre aux exigences de lubrification des moteurs diesel modernes, à haut rendement et à faibles émissions • Offre une excellente protection contre l'usure, la corrosion et les dépôts • Possède une capacité accrue à disperser la suie, adaptée aux moteurs diesel modernes équipés de recirculation des gaz d'échappement (EGR) et de filtres à particules diesel (DPF) pour protéger contre l'usure causée par la suie • Amélioration de la résistance à l'oxydation et de la stabilité thermique pour une durée de vie prolongée de l'huile • Indice de viscosité excellent pour protéger le moteur lors des démarrages à froid ainsi qu'une bonne performance à haute température.

Automotive
Heavy Duty
Diesel Engine Oil

CJ-4 15W-40

HIGH POWER EURO 5 PLUS

SYNTHETIC BLEND



208 Liters | **20 Liters**

RENUOX OIL
Ultimate Quality Lubricant



CJ-4 15W-40

HIGH POWER EURO 5 PLUS

API: CJ-4 SAE: 15W-40

Renuox High Power Euro 5 Plus is formulated using synthetic base oil for use in heavy duty diesel engines that work in harsh conditions. The anti-wear formulation and very high spreadability are the distinctive features of this product.

This lubricant is designed in accordance with the requirements of the latest US07 emission standards and for engines with exhaust purification systems, especially DPF (Diesel Particulate Filter), DOD (Diesel Particulate Diffuser) and EGR (Exhaust Gas Recirculation), which use fuels They are designed with low sulfur, it is suitable.

Properties	ASTM Test Method	15W-40
Viscosity cst 100°C	D-445	14.5
Viscosity Index, Min	D-2270	135
Flash Point,°C	D-92	230
Pour Point,°C	D-97	-30
Density @ 15°C, kg/m³	D-1298	885
Total base number (mg KOH/g)	D-2896	10.0

Specification Level:

API CJ-4, CI-4 Plus, CI-4, CH-4 ACEA E7 Cummins CES 20081 Volvo VDS-4
Mack E0-0 Premium Plus MB 228.31 MAN M3275 Renault RLD-3
Detroit Diesel DFS 93K218 Deutz DQC III-10 LA Suitable for modern low-emission diesel engines with EGR systems and some DPFs

API: CJ-4 SAE: 15W-40

Renuox High Power Euro 5 Plus ,est formulé en utilisant de l'huile de base synthétique pour une utilisation dans les moteurs diesel lourds qui travaillent dans des conditions difficiles. La formulation anti-usure et la très grande capacité de dispersion sont les caractéristiques distinctives de ce produit.

Ce lubrifiant est conçu en accord avec les exigences des dernières normes d'émission US07 et pour les moteurs avec systèmes de purification des gaz d'échappement, en particulier DPF (Filtre à particules diesel), DOD (Diffuseur de particules diesel) et EGR (Recirculation des gaz d'échappement), qui utilisent des carburants conçus avec une faible teneur en soufre. Il est approprié

Automotive
Heavy Duty
Diesel Engine Oil

CI-4 10W-40

TURBO POWER EURO III PLUS

SYNTHETIC BLEND



208 Liters | 20 Liters

RENUOX OIL
Ultimate Quality Lubricant



CI-4 10W-40

TURBO POWER EURO III PLUS

API : CI-4 SAE : 10W-40

Renuox Turbo Power E III Plus, is a diesel engine oil with API CI-4 quality level and SAE 10W-40 for use in light and heavy duty diesel engines and diesel vehicles designed to meet Euro III standards.

This engine oil has anti-corrosion and anti - wear properties and maintains high oil viscosity at high operating temperature and is resistant to high oxidation to neutralize the acids resulting from fuel combustion and also has high cleaning and suspending properties.

Renuox Turbo Power Euro III Plus engine oil is recommended for all cars that have the standard level of Euro II and Euro III emissions.

Properties	ASTM Test Method	10W-40
Viscosity cst 100°C	D-445	14.6
Viscosity Index, Min	D-2270	145
Flash Point,°C	D-92	228
Pour Point,°C	D-97	-36
Density @ 15°C, kg/m³	D-1298	880
Total base number (mg KOH/g)	D-2896	10.5

Specification Level:

API CI-4, CH-4, CG-4, CF-4 ACEA E7 Cummins CES 20078 / 20077 Volvo VDS-3
Mack E0-N Premium Plus MB 228.3 MAN M3275 Renault RLD / RLD-2
CAT ECF-1-a Global DHD-1 Suitable for turbocharged, high-speed four-stroke diesel engines

API : CI-4 SAE : 10W-40

Renuox Turbo Power Euro III Plus ,est une huile moteur diesel de niveau de qualité API CI-4 et SAE 10W-40, destinée à une utilisation dans des moteurs diesel légers et lourds ainsi que dans des véhicules diesel conçus pour répondre aux normes Euro III.

Cette huile moteur possède des propriétés anti-corrosion et anti-usure, maintient une viscosité élevée de l'huile à des températures de fonctionnement élevées et résiste à une oxydation élevée pour neutraliser les acides résultant de la combustion du carburant. Elle possède également de hautes propriétés nettoyantes et suspendantes.

L'huile moteur Renuox Turbo Power Euro III Plus est recommandée pour toutes les voitures ayant un niveau de normes d'émissions Euro II et Euro III.

Automotive
Heavy Duty
Diesel Engine Oil

CI-4 15W-40

ULTRA POWER PLUS

SYNTHETIC BLEND



208 Liters | 20 Liters

RENUOX OIL
Ultimate Quality Lubricant



CI-4 15W-40

ULTRA POWER PLUS

API:CI-4 SAE:15W-40

Renoux Ultra Power Plus, is a diesel engine oil with high quality base oil and special additives that guarantees maximum power and minimum pollutant emissions under extremely difficult operating conditions. Formulated for the latest and most modern diesel engines of 2002. This engine oil is formulated for use in road construction, road transport, mining and industrial applications. This engine oil is recommended for all types of ultra-modern diesel engines and high performance diesel engines, road and mining machinery, all types of heavy duty road vehicles, modern industrial diesel engines and advanced CI4 quality agricultural and civil engineering equipment.

Properties	ASTM Test Method	15W-40
Viscosity cst 100°C	D-445	14.5
Viscosity Index, Min	D-2270	135
Flash Point,°C	D-92	230
Pour Point,°C	D-97	-30
Density @ 15°C, kg/m³	D-1298	885
Total base number (mg KOH/g)	D-2896	10.0

Specification Level:

API CI-4, CH-4, CG-4, CF-4 ACEA E7 Cummins CES 20078 / 20077 Volvo VDS-3
Mack E0-N Premium Plus MB 228.3 MAN M3275 Renault RLD / RLD-2
CAT ECF-1-a Global DHD-1 Suitable for EGR-equipped and turbocharged high-speed diesel engines

API:CI-4 SAE:15W-40

Renuox Ultra Power Plus, est une huile de base de haute qualité et des additifs spéciaux qui garantissent une puissance maximale et des émissions de polluants minimales dans des conditions de fonctionnement extrêmement difficiles. Formulée pour les moteurs diesel les plus récents et les plus modernes de 2002, cette huile moteur est formulée pour une utilisation dans la construction routière, le transport routier, l'exploitation minière et les applications industrielles. Cette huile moteur est recommandée pour tous les types de moteurs diesel ultra-modernes et de haute performance, les machines de chantier et d'exploitation minière, tous les types de véhicules routiers lourds, les moteurs diesel industriels modernes et les équipements agricoles et de génie civil de qualité CI4 avancée.

Automotive
Heavy Duty
Diesel Engine Oil

CH-4 20W-50

POWER LUXURY PLUS

HIGH QUALITY PRODUCT



208 Liters

20 Liters

RENUOX OIL
Ultimate Quality Lubricant



CH-4 20W-50

POWER LUXURY PLUS

API:CH-4 SAE:20W-50

Renuox Power Luxury Plus, this engine oil is produced with high quality base oil and special additives, so it can be used in modern diesel engines.

Advantages: • The presence of high-quality additives in the SAE 20W-50 grade extends engine lifespan and protects engine components as much as possible and can be used for advanced turbocharged and supercharged diesel engines. • This product is a first-class diesel engine oil that has good and acceptable engine performance in difficult condition. • This engine oil is manufactured in grades SAE 20W-50 and SAE 15W-40.

Properties	ASTM Test Method	20W-50
Viscosity cst 100°C	D-445	18.5
Viscosity Index, Min	D-2270	125
Flash Point,°C	D-92	240
Pour Point,°C	D-97	-18
Density @ 15°C, kg/m³	D-1298	895
Total base number (mg KOH/g)	D-2896	10.0

Specification Level:

API CH-4, CG-4, CF-4, CF ACEA E2 Cummins CES 20076 Caterpillar CF-1
MB 228.1 MAN 271 Suitable for older-generation diesel engines, turbocharged or naturally aspirated

API:CH-4 SAE:20W-50

Renuox Power Luxury Plus, cette huile moteur est produite avec une huile de base de haute qualité et des additifs spéciaux, ce qui permet son utilisation dans les moteurs diesel modernes.

Avantages: • La présence d'additifs de haute qualité dans la catégorie SAE 20W-50 prolonge la durée de vie du moteur et protège les composants du moteur autant que possible. Elle peut être utilisée pour les moteurs diesel avancés turbocompressés et suralimentés • Ce produit est une huile moteur diesel de première classe qui offre une bonne et acceptable performance du moteur dans des conditions difficiles • Cette huile moteur est fabriquée en grades SAE 20W-50 et SAE 15W-40.



Automotive
Heavy Duty
Diesel Engine Oil

CD50 TURBO GENERAL

HIGH QUALITY PRODUCT

208 Liters | 20 Liters

RENUOX OIL
Ultimate Quality Lubricant



CD 50

TURBO GENERAL

API: CD SAE: 50

Renoux Turbo General 50 diesel engine oil is a combination of high-quality base oil and special additives and is suitable for turbocharged diesel engines, heavy vehicles and road construction machinery.

Advantages: • Special additives including anti-corrosion, anti-wear, anti-oxidation and anti-rust, cleaners and suspensions and thermal stability are used in the formula of this engine oil • This ensures that the engine oil, while maintaining viscosity, does not have a pressure drop throughout its operation • This engine oil is suitable for all types of diesel engines with API CD quality level in hot and humid climates and hard working conditions. • The turbo general 50 is available in single-grade grades of SAE 30 and SAE 40 and multi-grade SAE 20W-50.

Properties	ASTM Test Method	20W-50
Viscosity cst 100°C	D-445	18.0
Viscosity Index, Min	D-2270	100
Flash Point,°C	D-92	250
Pour Point,°C	D-97	-9
Density @ 15°C, kg/m³	D-1298	900
Total base number (mg KOH/g)	D-2896	5.5

Specification Level:

API CD, CC MIL-L-2104C Suitable for naturally aspiratednand and low-speed turbocharged diesel engines

Typically used in old-generation trucks, buses, generators, and construction equipment

API: CD SAE: 50

Renuox Turbo General 50, cette huile moteur diesel est une combinaison d'huile de base de haute qualité et d'additifs spéciaux, et est adaptée pour les moteurs diesel turbocompressés, les véhicules lourds et les machines de construction routière.

Avantages: • Des additifs spéciaux, y compris des agents anti-corrosion, anti-usure, anti-oxydation et anti-rouille, des nettoyants et des suspensions, ainsi que de la stabilité thermique sont utilisés dans la formule de cette huile moteur • Cela garantit que l'huile moteur, tout en maintenant la viscosité, ne subit pas de baisse de pression tout au long de son fonctionnement • Cette huile moteur convient à tous les types de moteurs diesel avec un niveau de qualité API CD dans les climats chauds et humides et les conditions de travail difficiles • Le Turbo General 50 est disponible en grades monogrades SAE 30 et SAE 40 et en multigrade SAE 20W-50.



Automotive
Heavy Duty
Diesel Engine Oil

CC 40

POWER PLUS
HIGH QUALITY PRODUCT

208 Liters | **20 Liters**

RENUOX OIL
Ultimate Quality Lubricant



CC 40

POWER PLUS

API: CC SAE: 40

Renoux Power Plus is a high-quality mono-grade diesel engine oil formulated for naturally aspirated and turbocharged diesel engines operating under moderate to severe service conditions.

Produced with quality mineral base oils and performance additives, it provides reliable lubrication, engine cleanliness, and protection against wear, rust, and deposits in commercial and industrial diesel engines.

Advantages: • Reliable protection against engine wear • Good thermal stability and oxidation resistance • Helps control piston deposits and sludge formation • Provides dependable lubrication under heavy loads • Suitable for older diesel engine technologies • Helps reduce corrosion and rust formation • Stable performance in high-temperature operation • Long engine service life support

Properties	ASTM Test Method	40
Viscosity cst 100°C	D-445	14.0
Viscosity Index, Min	D-2270	105
Flash Point,°C	D-92	240
Pour Point,°C	D-97	-18
Density @ 15°C, kg/m³	D-1298	0.890
Total base number (mg KOH/g)	D-2896	7.0

Specification Level:

API: CC MIL-L-2104B

Suitable for heavy-duty diesel engines and industrial equipment requiring API CC performance.

API: CC SAE: 40

Renuox Power Plus, est une huile moteur diesel monograde de haute qualité, formulée pour les moteurs diesel atmosphériques et turbocompressés fonctionnant dans des conditions d'utilisation modérées à sévères.

Formulée à partir d'huiles minérales de base de qualité et d'additifs performants, elle assure une lubrification fiable, une propreté moteur optimale et une protection contre l'usure, la corrosion et les dépôts dans les moteurs diesel industriels et commerciaux.

Avantages: • Protection fiable contre l'usure du moteur • Bonne stabilité thermique et résistance à l'oxydation • Contribue à limiter les dépôts sur les pistons et la formation de boues • Lubrification fiable sous fortes charges • Adaptée aux moteurs diesel de générations précédentes • Contribue à réduire la corrosion et la formation de rouille • Performances stables à haute température • Prolonge la durée de vie du moteur

Automotive
Heavy Duty
Diesel Engine Oil

CC 50

POWER PLUS
HIGH QUALITY PRODUCT



208 Liters | 20 Liters

RENUOX OIL
Ultimate Quality Lubricant

CC 50

POWER PLUS

API: CC SAE: 50

Renoux Power Plus is a premium mono-grade diesel engine oil designed for heavy-duty diesel engines operating in high-temperature and demanding working conditions.
Its robust formulation delivers dependable lubrication, wear protection, and engine cleanliness for commercial vehicles, agricultural machinery, and industrial diesel engines.

Advantages: • Excellent protection under heavy-duty operation • High resistance to thermal breakdown • Helps minimize engine wear and piston deposits • Reliable lubrication at high operating temperatures • Good oxidation and corrosion resistance • Suitable for older diesel engine designs • Maintains engine cleanliness and durability • Supports long engine operating life

Properties	ASTM Test Method	50
Viscosity cst 100°C	D-445	18.5
Viscosity Index, Min	D-2270	102
Flash Point,°C	D-92	248
Pour Point,°C	D-97	-15
Density @ 15°C, kg/m³	D-1298	0.895
Total base number (mg KOH/g)	D-2896	7.2

Specification Level:

API: CC MIL-L-2104B

Recommended for diesel engines operating in warm climates and heavy-load applications.

API: CC SAE: 50

Renuox Power Plus, est une huile moteur diesel monograde de qualité supérieure, conçue pour les moteurs diesel à usage intensif fonctionnant dans des conditions de température et d'intensité élevées.
Sa formulation robuste assure une lubrification fiable, une protection contre l'usure et une propreté moteur optimale pour les véhicules utilitaires, les machines agricoles et les moteurs diesel industriels.

Avantages: • Excellente protection en conditions d'utilisation intensives • Haute résistance à la dégradation thermique • Contribue à minimiser l'usure du moteur et les dépôts sur les pistons • Lubrification fiable à haute température de fonctionnement • Bonne résistance à l'oxydation et à la corrosion • Convient aux moteurs diesel de conception ancienne • Maintient la propreté et la durabilité du moteur • Prolonge la durée de vie du moteur



Automotive
Heavy Duty
Diesel Engine Oil

CC 60

POWER PLUS
HIGH QUALITY PRODUCT



208 Liters | **20 Liters**

RENUOX OIL
Ultimate Quality Lubricant



CC 60

POWER PLUS

API: CC SAE: 60

Renoux Power Plus is a heavy-duty mono-grade diesel engine oil specially formulated for diesel engines operating under extremely severe temperature and load conditions.

Manufactured with high-quality mineral base oils and performance additives, it provides strong lubrication film strength, wear protection, and reliable engine performance in demanding industrial and commercial applications.

Advantages: • Superior lubrication under extreme operating conditions • Excellent resistance to wear and thermal breakdown • Helps reduce sludge and deposit formation • Strong oil film protection at high temperatures • Suitable for heavy-duty industrial diesel engines • Good corrosion and oxidation resistance • Reliable performance in continuous heavy-load operation • Helps extend engine durability and service life

Properties	ASTM Test Method	60
Viscosity cst 100°C	D-445	24
Viscosity Index, Min	D-2270	100
Flash Point,°C	D-92	255
Pour Point,°C	D-97	-12
Density @ 15°C, kg/m³	D-1298	0.900
Total base number (mg KOH/g)	D-2896	7.5

Specification Level:

API: CC MIL-L-2104B

Suitable for heavy-duty diesel engines, industrial machinery, and stationary engines operating under high-temperature conditions.

API: CC SAE: 50

Renuox Power Plus, est une huile moteur diesel monograde haute performance, spécialement formulée pour les moteurs diesel fonctionnant dans des conditions de température et de charge extrêmes.

Fabriquée à partir d'huiles de base minérales de haute qualité et d'additifs performants, elle assure une lubrification optimale, une protection contre l'usure et des performances moteur fiables dans les applications industrielles et commerciales exigeantes.


Avantages: • Lubrification supérieure en conditions de fonctionnement extrêmes • Excellente résistance à l'usure et à la dégradation thermique • Contribue à réduire la formation de boues et de dépôts • Protection renforcée du film d'huile à haute température • Adaptée aux moteurs diesel industriels haute performance • Bonne résistance à la corrosion et à l'oxydation • Performances fiables en fonctionnement continu sous forte charge • Contribue à prolonger la durée de vie du moteur

RENUOX OIL

Ultimate Quality Lubricant

Diesel Engine Oil

Marine

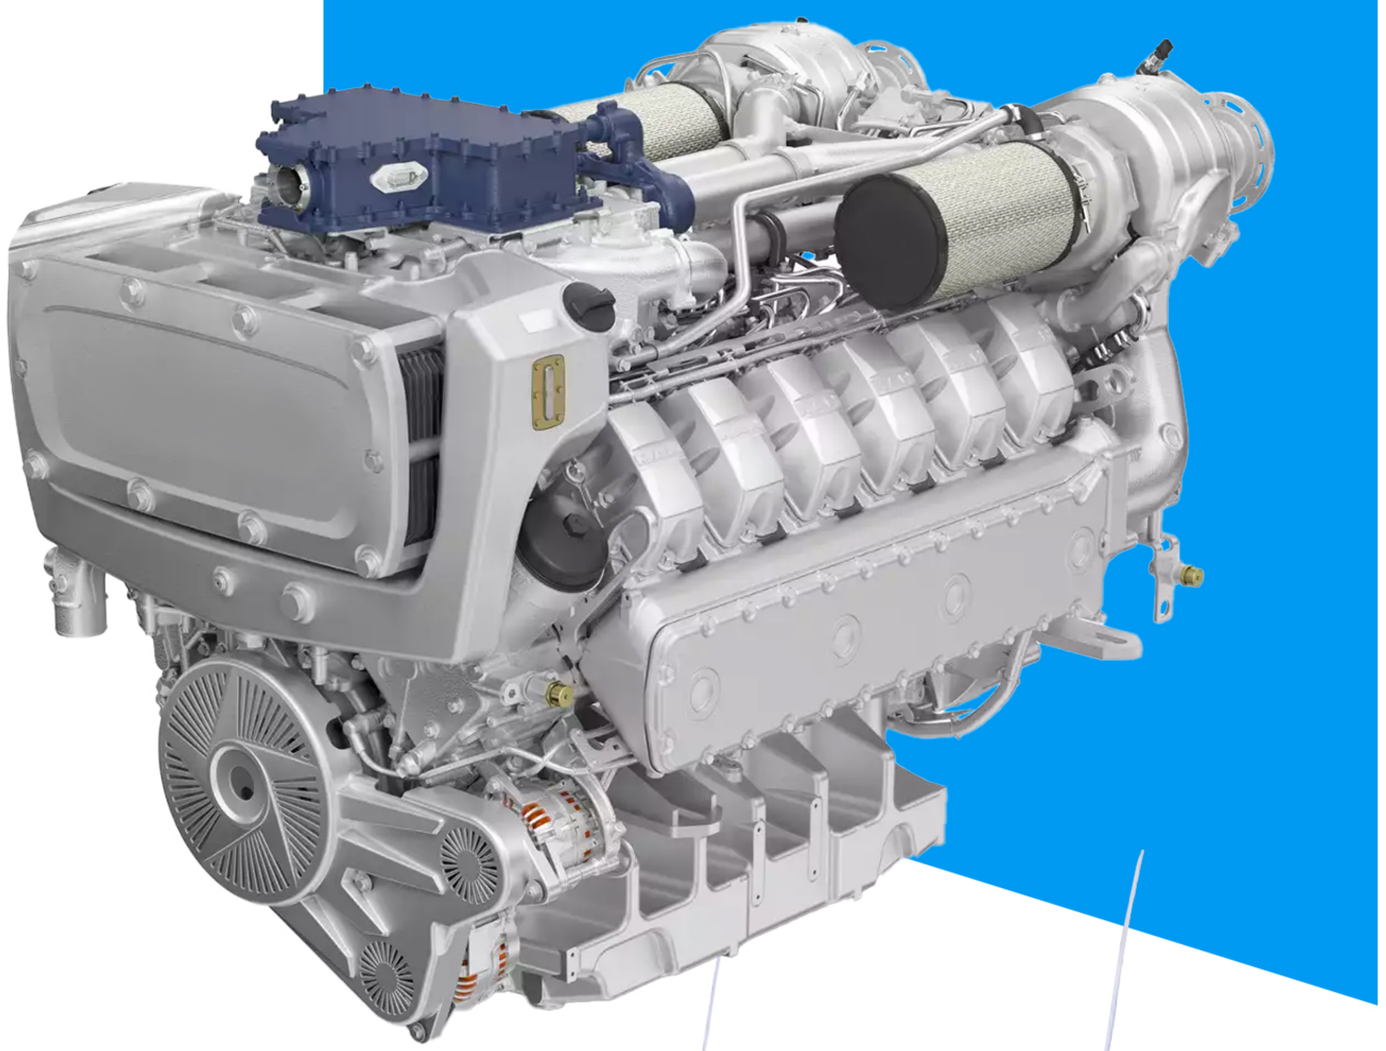



100

MARINE

Diesel Engine Oil

MARINE
Diesel Engine Oil

CI-4 15W40

TURBO POWER PLUS

SYNTHETIC BLEND



208 Liters | 20 Liters

RENUOX OIL
Ultimate Quality Lubricant



CI-4 15W-40

TURBO POWER PLUS

API:CI-4 SAE: 15W-40

Renuox Turbo Power Plus (Marine), A high quality engine oil designed for use in diesel engines, it can protect the engine from degradation and damage, allowing the engine to perform better and protect the internal parts.

This oil is specially designed for high-speed landing craft-boats and diesel engines and is designed for harsh marine conditions.

Advantages: • Reduce vibration and increase engine life • Improving engine performance at high and low temperatures • Reducing carbon and complex pollutants • Improving the discharge of hot gases and reducing emissions • Improving the performance of motor drives • Reduce fuel consumption

Properties	ASTM Test Method	15W-40
Viscosity cst 100°C	D-445	14.5
Viscosity Index, Min	D-2270	135
Flash Point,°C	D-92	230
Pour Point,°C	D-97	-30
Density @ 15°C, kg/m³	D-1298	885
Total base number (mg KOH/g)	D-2896	10.0

Specification Level:

API CI-4, CH-4, CG-4, CF-4 ACEA E7 Cummins CES 20078 Volvo VDS-3 MB 228.3 MAN M3275 MTU Category 2 Caterpillar ECF-1 / ECF-2 Global DHD-1 JASO DH-1 Detroit Diesel DFS 93K218 Suitable for high-speed, four-stroke marine diesel engines operating under heavy loads

Compatible with engines using EGR systems (Exhaust Gas Recirculation)

Recommended for workboats, fishing vessels, and coastal ships with medium/high-speed diesel engines

API:CI-4 SAE: 15W-40

Renuox Turbo Power Plus (Marine), une huile moteur de haute qualité conçue pour une utilisation dans les moteurs diesel, peut protéger le moteur contre la dégradation et les dommages, permettant au moteur de mieux fonctionner et de protéger les pièces internes. Cette huile est spécialement conçue pour les embarcations à grande vitesse et les moteurs diesel, et est conçue pour des conditions marines difficiles.

Avantages: • Réduire les vibrations et prolonger la durée de vie du moteur • Améliorer les performances du moteur à haute et basse température • Réduire le carbone et les polluants complexes • Améliorer l'évacuation des gaz chauds et réduire les émissions • Améliorer les performances des entraînements moteurs • Réduire la consommation de carburant.

MARINE
Diesel Engine Oil

CD50

POWER GENERAL
HIGH QUALITY PRODUCT



208 Liters | **20 Liters**

RENUOX OIL
Ultimate Quality Lubricant



CD 50

POWER GENERAL

API: CD SAE: 50

Renuox Power General 50 (Marine), It is a high quality engine oil and is specially produced for marine diesel engines and is recommended for landing craft and low speed diesel engines. This oil has a higher viscosity level and is usually used in hot and humid climates.

Advantages: • Reduce wear and increase engine life • Suitable for use in diesel engines • Increase engine efficiency in high temperature conditions • Improved engine corrosion protection

Properties	ASTM Test Method	50
Viscosity cst 100°C	D-445	18.0
Viscosity Index, Min	D-2270	100
Flash Point,°C	D-92	250
Pour Point,°C	D-97	-9
Density @ 15°C, kg/m³	D-1298	900
Total base number (mg KOH/g)	D-2896	5.5

Specification Level:

API CD, CC MIL-L-2104C MIL-L-46152B Suitable for low and medium-speed marine diesel engines without advanced emission controls
Recommended for naturally aspirated or low-boost turbocharged marine engines
Ideal for auxiliary engines, older propulsion systems, and deck machinery
suitable for vessels operating in warm marine climates
compatible with fuels containing moderate sulfur content

API: CD SAE: 50

Renuox Power General 50 (Marine), est une huile moteur de haute qualité spécialement produite pour les moteurs diesel marins et recommandée pour les embarcations à grande vitesse et les moteurs diesel à faible vitesse. Cette huile a un niveau de viscosité plus élevé et est généralement utilisée dans les climats chauds et humides.

Avantages: • Réduire l'usure et augmenter la durée de vie du moteur • Convient pour une utilisation dans les moteurs diesel • Augmenter l'efficacité du moteur dans des conditions de haute température • Amélioration de la protection contre la corrosion du moteur.

RENUOX OIL

Ultimate Quality Lubricant

Automotive



Heavy Duty

Gear Box Oil





105 | **HEAVY DUTY GEARBOX Oil**

HEAVY DUTY GEARBOX Oil

GL-5 75W-80

SYNTHETIC BLEND



208 Liters

20 Liters

RENUOX OIL
Ultimate Quality Lubricant

GL-5 EP
75W-80

API: GL-5 SAE: 75W-80

Renuox Gear Oil, It is prepared from high quality base oil with high viscosity index. The amount of EP additive used in the production of this oil increases the resistance of the oil against high pressure and stress.

This gear oil is designed for use in manual gearboxes and differentials.

Advantages: • Increased protection against wear and friction • Improved performance in high temperature conditions • Reduction of noise and vibration in the gearbox • Excellent protection against wear, corrosion and rusting and extreme pressure in high performance vehicles in harsh conditions and high speed

Properties	ASTM Test Method	75W-80
Viscosity cst 100°C	D-445	11.5
Viscosity Index, Min	D-2270	165
Flash Point,°C	D-92	220
Pour Point,°C	D-97	-48
Density @ 15°C, kg/m³	D-1298	880
Sulfur - Phosphorus Additive System		Yes (EP additives)

Specification Level:

PI: GL-5 MIL-PRF-2105E SAE J2360 MAN 342 Typ M1/M2/M3 Scania STO 1:0 Volvo 97312 / 97305 MB-Approval 235.8 ZF TE-ML 07A/08/16B/17B/19B/21A Mack GO-J Plus DAF / Renault / Iveco Extended Drain Requirements

Suitable for use in synchronized and non-synchronized manual gearboxes and axles requiring GL-5 protection

API: GL-5 SAE: 75W-80

Renuox Gear Oil L'Huile de boîte ,est préparée à partir d'une huile de base de haute qualité avec un indice de viscosité élevé. La quantité d'additif EP utilisée dans la production de cette huile augmente la résistance de l'huile contre les hautes pressions et le stress.

Cette huile pour engrenages est conçue pour une utilisation dans les boîtes de vitesses manuelles et les différentiels.

Avantages: • Protection accrue contre l'usure et la friction • Amélioration des performances dans des conditions de haute température • Réduction du bruit et des vibrations dans la boîte de vitesses • Protection excellente contre l'usure, la corrosion, la rouille et les pressions extrêmes dans les véhicules haute performance dans des conditions difficiles et à grande vitesse.

HEAVY DUTY
GEARBOX Oil

GL-4 75W-80

SYNTHETIC BLEND



208 Liters

20 Liters

RENUOX OIL
Ultimate Quality Lubricant

GL-4 EP
75W-80

API: GL-4 SAE: 75W-80

Renuox Gear Oil, A high quality gear oil designed for use in manual transmissions, transmissions and differentials in passenger cars, light trucks and SUVs. Excellent protection against wear and corrosion while maintaining smooth and efficient operation over a wide range of temperatures and conditions.

Advantages: • Smooth and silent operation • Improved fuel efficiency • Reduce wear and increase gear life • Protection against rust and corrosion • Suitable for use in a wide range of temperatures and harsh conditions

Properties	ASTM Test Method	75W-80
Viscosity cst 100°C	D-445	9.5
Viscosity Index, Min	D-2270	180
Flash Point,°C	D-92	200
Pour Point,°C	D-97	-40
Density @ 15°C, kg/m³	D-1298	880
Sulfur - Phosphorus Additive System		Yes (EP additives)

Specification Level:

API: GL-4 SAE J2360 (for GL-4 class) MIL-L-2105 ZF TE-ML 02D / 16K / 17A MAN 341 Typ E1 / Z2 MB 235.4 Volvo 97305 Renault Trucks (RVI) gearboxes requiring GL-4 Scania ST0 1 : 1 G Suitable for use in synchronized manual transmissions and transaxles where a low-viscosity GL-4 oil is recommended

API: GL-4 SAE: 75W-80

Renuox Gear Oil, est une huile de transmission de haute qualité conçue pour une utilisation dans les transmissions manuelles, les transmissions et les différentiels des voitures de tourisme, des camions légers et des VUS. Elle offre une excellente protection contre l'usure et la corrosion tout en maintenant un fonctionnement fluide et efficace sur une large gamme de températures et de conditions.

Avantages: • Fonctionnement fluide et silencieux • Amélioration de l'efficacité énergétique • Réduction de l'usure et augmentation de la durée de vie des engrenages • Protection contre la rouille et la corrosion • Convient pour une utilisation dans une large gamme de températures et de conditions difficiles

HEAVY DUTY
GEARBOX Oil

GL-5 85W-90

HIGH QUALITY PRODUCT



208 Liters

20 Liters

RENUOX OIL
Ultimate Quality Lubricant



GL-5 EP

85W-90

API: GL-5 SAE: 85W-90

Renuox Gear Oil, A high performance gear oil designed for use in differentials, manual transmissions and other gear applications in high performance and heavy duty vehicles. It provides excellent protection against wear, corrosion and extreme pressure, ensuring reliable performance even in harsh conditions.

Advantages: • Advanced protection against wear and friction • Improved performance in high temperature conditions • Reduction of noise and vibration in the gearbox • Excellent resistance to corrosion and rust • Suitable for use in heavy and high-performance vehicles

Properties	ASTM Test Method	85W-90
Viscosity cst 100°C	D-445	18.5
Viscosity Index, Min	D-2270	105
Flash Point,°C	D-92	220
Pour Point,°C	D-97	-18
Density @ 15°C, kg/m³	D-1298	910
Sulfur - Phosphorus Additive System		Yes (EP additives)

Specification Level:

API: GL-5 MIL-L-2105D SAE J2360 ZF TE-ML: 05A / 07A / 12E / 16B / 17B / 19B / 21A MAN 342 Typ M1 MB235.0

API: GL-5 SAE: 85W-90

Renuox Gear Oil, est une huile de transmission haute performance conçue pour une utilisation dans les différentiels, les transmissions manuelles et autres applications de transmission dans les véhicules à haute performance et à usage intensif. Elle offre une protection exceptionnelle contre l'usure, la corrosion et les pressions extrêmes, garantissant des performances fiables même dans des conditions difficiles.

Avantages: • Protection avancée contre l'usure et la friction • Performances améliorées dans des conditions de haute température • Réduction du bruit et des vibrations dans la boîte de vitesses • Excellente résistance à la corrosion et à la rouille • Convient aux véhicules lourds et haute performance

HEAVY DUTY
GEARBOX Oil

GL-5 85W-140

HIGH QUALITY PRODUCT



208 Liters | 20 Liters

RENUOX OIL
Ultimate Quality Lubricant



GL-5 EP
85W-140

API: GL-5 SAE: 85W-140

Renuox Gear Oil, A high performance gear oil designed for use in heavy duty differentials and manual transmissions. It offers exceptional protection against wear, corrosion and extreme pressure, making it ideal for tough applications.

Advantages: • Excellent wear protection and friction reduction • Excellent performance in high temperature conditions • Reduction of noise and vibration in the gearbox • Advanced protection against corrosion and rust • Suitable for use in heavy and high-performance vehicles

Properties	ASTM Test Method	85W-140
Viscosity cst 100°C	D-445	27.5
Viscosity Index, Min	D-2270	95
Flash Point,°C	D-92	230
Pour Point,°C	D-97	-15
Density @ 15°C, kg/m³	D-1298	900
Sulfur - Phosphorus Additive System		Yes (EP additives)

Specification Level:

API: GL-5 MIL-PRF-2105E SAE J2360 ZF TE-ML: 05A / 07A / 12E / 16D / 21A
MAN 342 Typ M2 Mack GO-J Scania ST0 1:0 Suitable for hypoid gears under high-speed / shock-load and low-speed / high-torque conditions
Recommended for heavy-duty differentials, axles, final drives, and manual transmissions

API: GL-5 SAE: 85W-140

Renuox Gear Oil, est une huile de transmission haute performance conçue pour une utilisation dans les différentiels à usage intensif et les transmissions manuelles. Elle offre une protection exceptionnelle contre l'usure, la corrosion et les pressions extrêmes, ce qui la rend idéale pour des applications difficiles.

Avantages: • Excellente protection contre l'usure et réduction de la friction • Excellentes performances dans des conditions de haute température • Réduction du bruit et des vibrations dans la boîte de vitesses • Protection avancée contre la corrosion et la rouille • Convient aux véhicules lourds et haute performance

RENUOX OIL

Ultimate Quality Lubricant

Hydraulic



Hydraulic Oil





HYDRAULIC
Oil

HYDRAULIC OIL

HIGH QUALITY PRODUCT

208 Liters | 20 Liters | 1 Liter

RENUOX OIL
Ultimate Quality Lubricant

HYDRAULIC OIL
DIN: 51524

HYDRAULIC OIL DIN: 51524
Renuox VG-68H, Hydraulic oil is designed and produced by using the most advanced method and technology in the world, using high-quality base oil and suitable additives.
This product is recommended for use in all mechanical excavators, loaders and all road construction and industrial devices and hydraulic and pneumatic jacks without pressure drop and working in difficult conditions.
Advantages: • Extensive wear protection • Reducing energy consumption • Better isolation from moisture for increased surface protection • Long operation time through excellent thermal and oxidation stability • Anti-corrosion and anti-rust

Properties	ASTM Test Method	VG-68 HLP
Viscosity cst 100°C	D-445	8.7
Viscosity Index, Min	D-2270	105
Flash Point,°C	D-92	220
Pour Point,°C	D-97	-24
Density @ 15°C, kg/m³	D-1298	880
Foaming (Seq. I/II/III)	D-892	<50/0
Demulsibility (54°C,40/40/0)	D-1401	Pass
Copper Strip Corrosion (3h @ 100°C)	D-130	1a
Zinc Content (anti-wear additive)		Yes

Specification Level:


DIN 51524 Part II (HLP) ISO6743-4 HM AFNOR NF E 48-603 HM Cincinnati Machine P-69
Denison HF-0, HF-1, HF-2 Vickers I-286-S, M-2950-S Bosch Rexroth RD 90220
ASTM D6158 Type HM
Excellent anti-wear, oxidation stability, and water separation
Suitable for industrial hydraulic systems, presses, injection molding machines, mobil hydraulics, and gear-driven systems requiring AW performance

HYDRAULIC OIL DIN: 51524
Renuox VG-68H huile hydraulique conçue et produite en utilisant la méthode et la technologie les plus avancées au monde, en utilisant de l'huile de base de haute qualité et des additifs appropriés.
Ce produit est recommandé pour une utilisation dans tous les excavateurs mécaniques, les chargeurs et tous les appareils de construction routière et industrielle ainsi que les vérins hydrauliques et pneumatiques sans perte de pression et travaillant dans des conditions difficiles.
Avantages: • Protection étendue contre l'usure • Réduction de la consommation d'énergie • Meilleure isolation de l'humidité pour une protection de surface accrue • Longue durée de fonctionnement grâce à une excellente stabilité thermique et à l'oxydation • Anti-corrosion et anti-rouille

RENUOX OIL

Ultimate Quality Lubricant

Lithium Grease

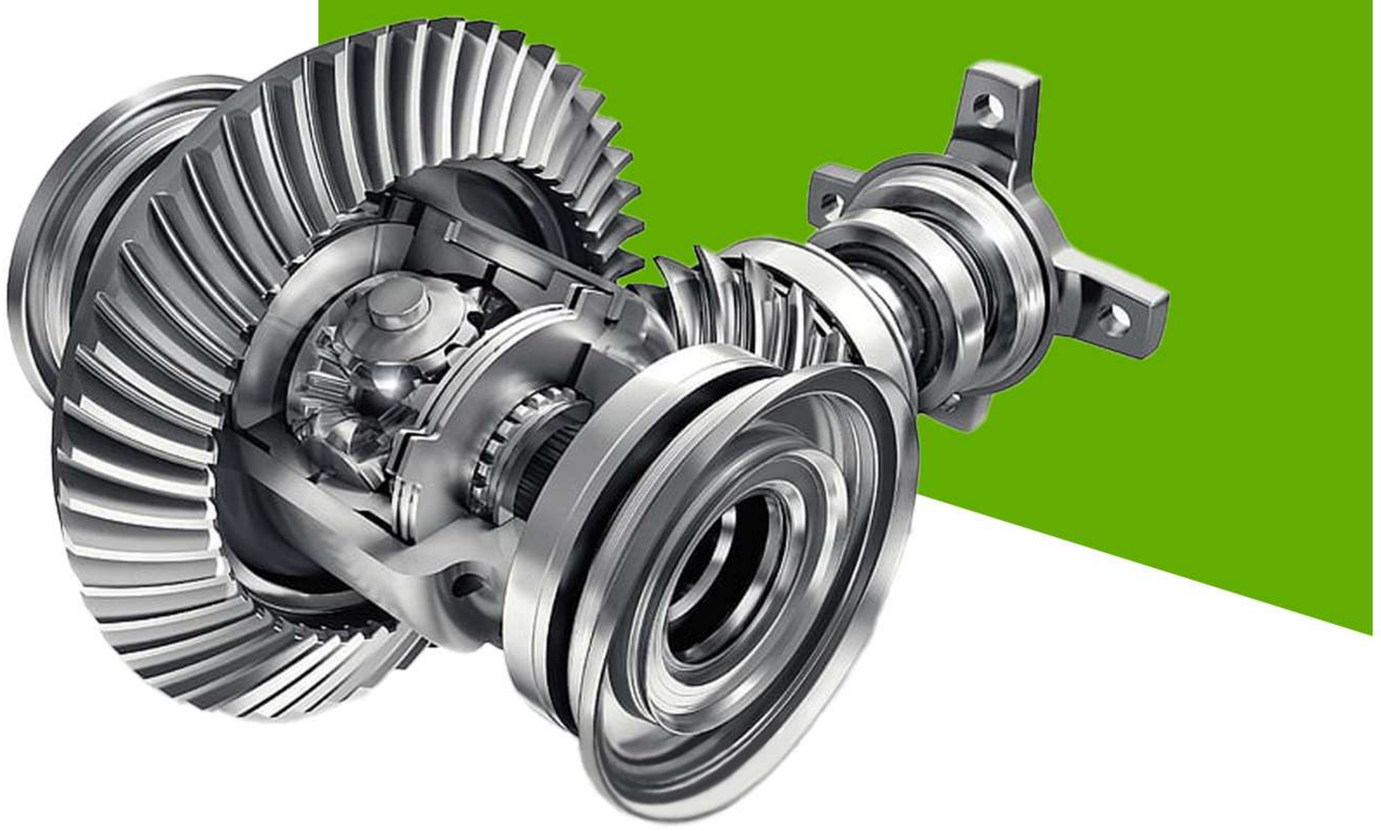

Lithium Grease



117 | LITHIUM GREASE

LITHIUM GREASE

LITHIUM GREASE

NLGI3



35 LBS | 10 LBS | 2 LBS | 1.4 LBS | 1.2 LBS

RENUOX OIL
Ultimate Quality Lubricant

LITHIUM GREASE
NLGI3

LITHIUM GREASE NLGI 3

Renuox Lithium Grease, This grease is a thickener of lithium soap, which is made from high-quality base oil and special additives. Lithium grease is a multi-purpose grease and among its important features is oxidation stability and working conditions at high temperature. It is worth mentioning that the highest recommended temperature for the operation of this grease is 130 C.

Applications: Shell pump bearing, wheel and journal, electric motor, lubrication of all kinds of bearings and gears.

Advantages: • preventing wear and friction of parts • excellent stability against oxidation • wide operating temperature range • good resistance to water and heat

Quality Level: DIN 51502, K1K-20, K2K-20, K3K-20

Properties	ASTM Test Method	NLGI 3
NLGI Grade	D-217	3
Soap Type	-	Lithium
Worked Penetration	D-217	250
Dropping Point	D-566	≥190°C
Base Oil Viscosity @ 40°C	D-445	-150 cSt
Timken OK Load	D-2509	≥ l8 lb
Operating Temp. Range	-	-20°C to +130°C

Specification Level:

Volvo VDS-4 MACK EO-O Premium Plus JASO DH-2 API CK-4 Cummins CES 20081
CAT ECF-3 MB 228.31 MTU Oil Category 2.1

LITHIUM GREASE NLGI 3

Renuox Lithium Grease, cette graisse est un épaississant de savon de lithium, fabriqué à partir d'huile de base de haute qualité et d'additifs spéciaux. La graisse au lithium est une graisse polyvalente et parmi ses caractéristiques importantes, on trouve la stabilité à l'oxydation et les conditions de fonctionnement à haute température. Il est à noter que la température maximale recommandée pour l'utilisation de cette graisse est de 130 °C.

Applications: Roulement de pompe à coque, roues et journaux, moteur électrique, lubrification de tous types de roulements et d'engrenages.

Avantages: • Prévention de l'usure et de la friction des pièces • Excellente stabilité contre l'oxydation • Large plage de température de fonctionnement • Bonne résistance à l'eau et à la chaleur

Niveau de spécification: DIN 51502, K1K-20, K2K-20, K3K-20

RENUOX OIL

Ultimate Quality Lubricant

Octane Booster

For Gasoline Engines







120 | OCTANE BOOSTER Gasoline Engine

OCTANE BOOSTER
Gasoline Engine

ULTIMATE POWER & HIGH POWER





500 CC | 270 CC

RENUOX OIL
Ultimate Quality Lubricant



OCTANE BOOSTER

FOR GASOLINE ENGINES

RENUOX OCTANE BOOSTER
ULTIMATE POWER & HIGH POWER

- Improved combustion performance and valve protection
- Eliminating engine knocking sound (caused by low octane)
- Improves the octane level and reduces the emission of toxic pollutants
- Increasing useful life and reducing car engine ripping
- Reduce fuel consumption
- Improving the acceleration and power of turbo engines

****RENUOX Booster d'octane****
ULTIMATE POWER & HIGH POWER

- Amélioration des performances de combustion et protection des soupapes
- Élimination du bruit de cliquetis du moteur (causé par un indice d'octane faible)
- Améliore le niveau d'octane et réduit les émissions de polluants toxiques
- Augmentation de la durée de vie utile et réduction de l'usure du moteur
- Réduction de la consommation de carburant
- Amélioration de l'accélération et de la puissance des moteurs turbo

RENUOX OIL

Ultimate Quality Lubricant

Brake Fluid

For Gasoline Engines





123 | BRAKE FLUID |



BRAKE FLUID

DOT3 & DOT4



250 CC

RENUOX OIL
Ultimate Quality Lubricant

BRAKE FLUID

DOT 3 & DOT 4

BRAKE FLUID - DOT 3 & DOT 4

- Suitable for all brake and clutch systems for which DOT 3 and DOT 4 are recommended
- Resistant to moisture absorption
- Compatibility whit rubber insulation and seals
- Very suitable viscosity at low temperatures and high heat
- It has anti-corrosion and anti-rust properties

Properties	Test Method	Typical Value
Appearance	Visual	Transparent, pale yellow
Boiling Point (Dry)	SAE J1703	≥260°C
Boiling Point (Wet)	SAE J1703	≥160°C
Viscosity cst 100°C	ASTM D-445	3 mm^2/s
Density @ 20°C, kg/m³	ASTM D-1298	1.05
PH Value	ASTM D-1287	11.5
Water Content	Karl Fischer	≤ 0.2 %
Compatibility	-	With EPDM rubber, metal brake system

Specification Level:

SAE J1704 FMVSS No. 116 DOT 4 ISO 4925 Class 4
Suitable for disk and drum brake systems in passenger cars, trucks, and motorcycles
Compatible with ABS and EPS systems
Mixable with DOT 3 and DOT 4 4 (glycol-based) fluids
Not suitables for use in DOT 5 (silicone-based) systems
Corrosion protection for aluminum, cast iron, and steel brake components

Liquide de Frein - DOT 3 & DOT 4

- Convient à tous les systèmes de freinage et d'embrayage pour lesquels les DOT 3 et DOT 4 sont recommandés
- Résistant à l'absorption d'humidité
- Compatibilité avec l'isolation en caoutchouc et les joints
- Viscosité très adaptée aux basses températures et à la haute chaleur
- Possède des propriétés anti-corrosion et anti-rouille

THE BEST QUALITY

PACKAGING FOR EXPORT TO ALL OVER THE WORLD




Certificate of Registration

Management System General

RENUOX

Which complies with the requirements of :

ISO 14001:2015 Enviromental management system

Certificate of Completion No.: IR-S2570-EMS

Date of application submission : 29 Nov 2023

Certification Date: 29 Dec 2023

Certificate expiration date: 29 Nov 2026

From now on, according to the management system documentation, the registered company is entitled to mention the list of services of the registered companies in relation to the services mentioned below.
This Certificate of Registration is granted subject to the Regulations approved by the Board .

Yevgeniya Mikheyeva
Operations Manager
SIGNATURE

The Management System of :
Renuox Oil International Inc.

The Address of Central Office :
6d.398 Yonge St, 2074, Thornhill, Ontario, Canada

Scope to which this Certificate refers :
Production, packaging and sale of lubricants, petroleum and petrochemical products

ISO 14001


Certificate of Registration

Management System General

RENUOX

Which complies with the requirements of :

ISO 9001:2015 Quality Management System

Certificate of Completion No.: IR-S2570-QC

Date of application submission : 29 Nov 2023

Certification Date: 29 Dec 2023

Certificate expiration date: 29 Nov 2026

From now on, according to the management system documentation, the registered company is entitled to mention the list of services of the registered companies in relation to the services mentioned below.
This Certificate of Registration is granted subject to the Regulations approved by the Board .

Yevgeniya Mikheyeva
Operations Manager
SIGNATURE

The Management System of :
Renuox Oil International Inc.

The Address of Central Office :
6d.398 Yonge St, 2074, Thornhill, Ontario, Canada

Scope to which this Certificate refers :
Production, packaging and sale of lubricants, petroleum and petrochemical products

ISO 9001


Certificate of Registration

Management System General

RENUOX

Which complies with the requirements of :

ISO 29001:2020 Petroleum, petrochemical and natural gas industries

Certificate of Completion No.: IR-S2570-PPG

Date of application submission : 29 Nov 2023

Certification Date: 29 Dec 2023

Certificate expiration date: 29 Nov 2026

From now on, according to the management system documentation, the registered company is entitled to mention the list of services of the registered companies in relation to the services mentioned below.
This Certificate of Registration is granted subject to the Regulations approved by the Board .

Yevgeniya Mikheyeva
Operations Manager
SIGNATURE

The Management System of :
Renuox Oil International Inc.

The Address of Central Office :
6d.398 Yonge St, 2074, Thornhill, Ontario, Canada


Scope to which this Certificate refers :
Production, packaging and sale of lubricants, petroleum and petrochemical products


ISO 29001



WIPO | HAGUE
The International Design System

United States - European Union - Brazil - China - Canada - African countries

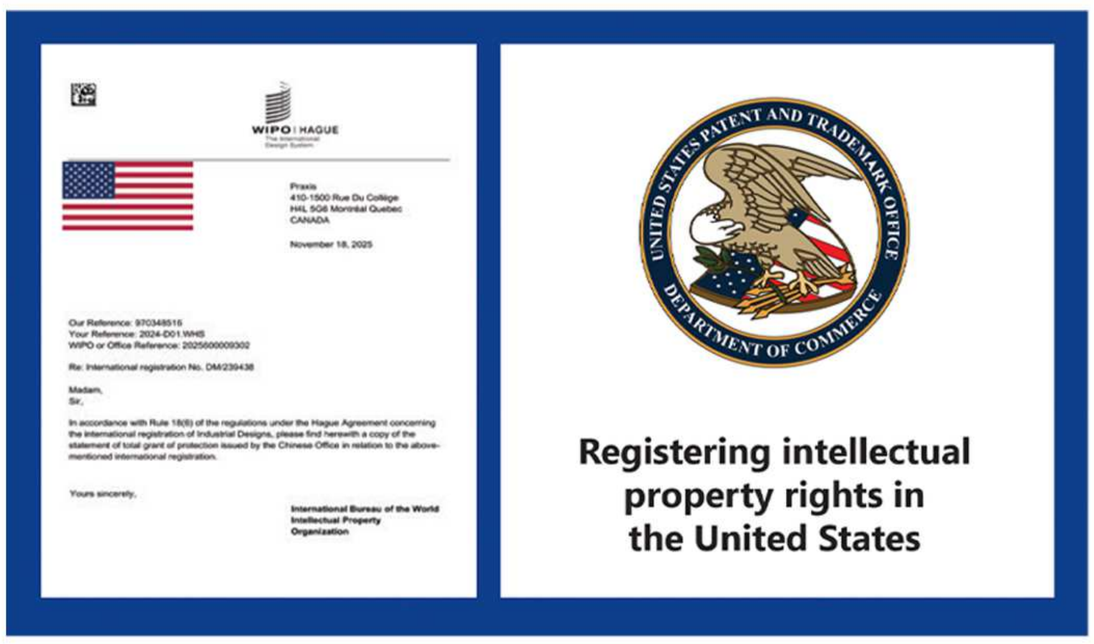


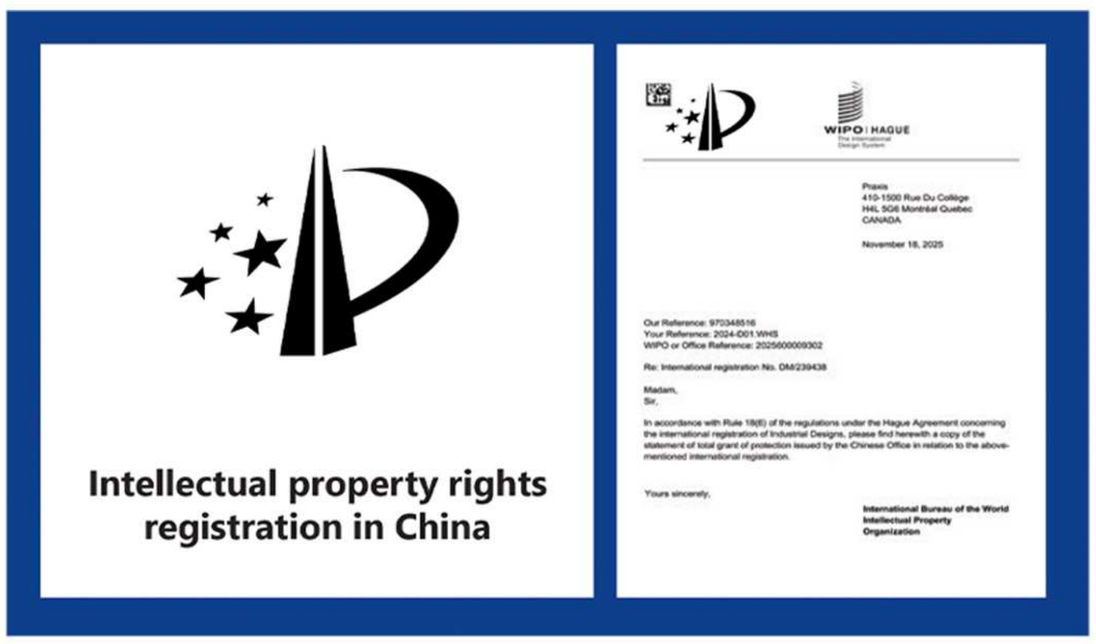







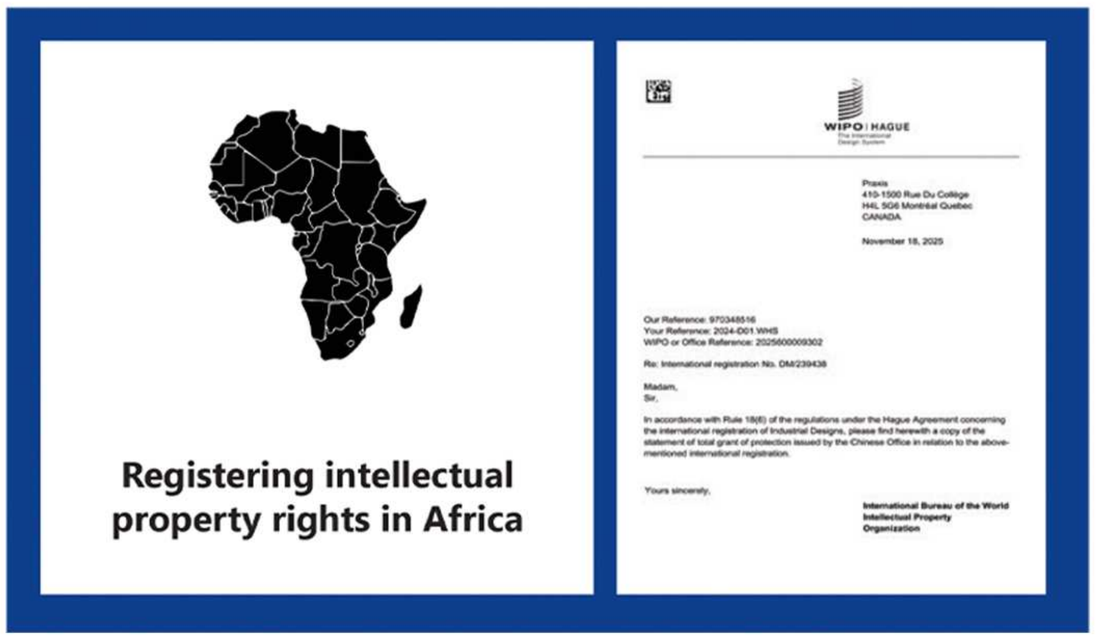

RENUOX OIL

CANADA - ONTARRIO
Central Office

World Map Bussines



RENUOX OIL

Ultimate Quality Lubricant

PERFORMANCE YOU CAN FEEL

Renuox.oil

Info@Renuoxoil.com

WWW.RENUOXOIL.COM

WWW.RENUOXOIL.CA

Canada Office: 6d-398 Yonge St, 2074, Thornhill, Ontario

Tell: +1(647)477-1755 & +1(647)847-7733